

Emergency Luminaire STYLE 51011 CG-S, 51011

Technical data

51011 CG-S, 51011

Viewing distance	17 m
Luminous flux \dots at the end of rated operating time	75 %
Enclosure material	Polycarbonate
Weight incl. cover	0.6 kg
Enclosure colour	Grey
Type of mounting	Wall and ceiling mounting
Dimensions (mm) (L x H x D)	342 x 95 x 59.5
Connection terminals	Loop terminals 3 x 2.5 mm ²
Voltage range	230 V 50/60 Hz, 220 V DC +25/-20%
Current consumption (220 V battery)	30 mA
Power consumption	16 VA
Permissible temperature range	-10°C to + 40°C
Lamp	8 W/T16, 450 lm
Insulation class	II
Degree of protection	IP 41 (IP 54 kit for electronics and lamp, optional)



51011 CG-S
with legend foil



51011 CG-S
with clear cover


Ordering details

Type	Scope of supply	Order No.
51011 CG-S acc. DIN 4844	Luminaire enclosure with cover, quick-mounting set and 3 self-adhesive legend foils PL/PR/PU, with CEWA GUARD monitoring and 20 digit address switch	4 0071 348 170
51011 acc. DIN 4844	Luminaire enclosure with cover, quick-mounting set and 3 self-adhesive legend foils PL, PR and PU	4 0071 348 305
51011 CG-S	Luminaire enclosure with cover, quick-mounting set and 3 self-adhesive legend foils PL/PR/PU, with CEWA GUARD monitoring and 20 digit address switch	4 0071 352 705
51011	Luminaire enclosure with cover, quick-mounting set and 3 self-adhesive legend foils PL, PR and PU	4 0071 352 704

Accessories

Accessories see page 1/20

Dimensions (mm)

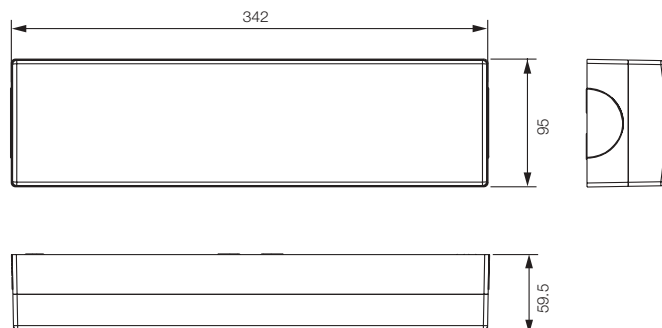


Emergency Luminaire STYLE 51011 CG-S, 51011

Lighting engineering (with 8 W/T16, 450 lm lamp)


Measuring level: 0.02 m, incl. 25 % ageing factor

Engineering help 51011 CG-S with legend foil for E = 1.25 lx and 0.625 lx

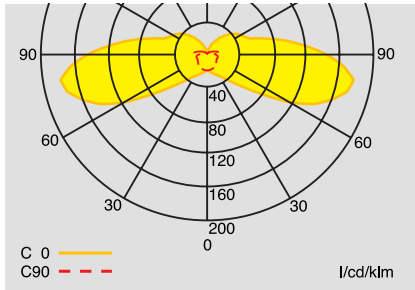

Polar curve 51011 CG-S
with legend-cover

Mounting height (m)	Types of mounting	Mounting distances (m)	
		1.25 lx	0.625 lx
2.0	Wall mounting with legend	2.5	3.2
2.5		2.8	3.6
3.0		3.0	4.0

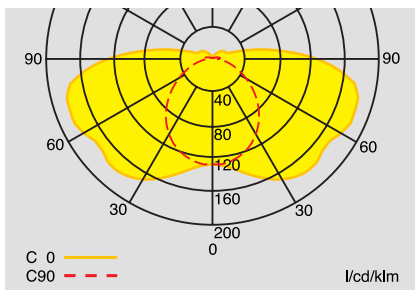

Polar curve 51011 CG-S
with clear cover

Engineering help 51011 CG-S with clear cover for E = 1.25 lx (0.625 lx)

Mounting height (m)	Types of mounting	Mounting distances (m)			
		L1	L2	L3	L4
2.5	Ceiling mounting	2.7 (3.4)	6.8 (8.6)	4.4 (5.8)	11.4 (14.8)
3.0	Escape route centre	2.8 (3.7)	7.4 (9.2)	4.4 (6.0)	12.0 (15.6)
4.0		2.8 (3.9)	7.8 (10.2)	4.3 (6.2)	12.2 (16.6)
5.0		2.3 (4.0)	7.8 (10.8)	4.1 (6.2)	12.0 (17.2)
6.0		1.4 (3.8)	7.4 (11.0)	3.1 (6.1)	11.8 (17.2)
7.0		- (3.3)	6.2 (11.0)	- (5.7)	10.8 (17.0)
2.0	Wall mounting	2.8 (3.5)	7.0 (8.6)	3.8 (5.1)	10.0 (13.0)
2.5		3.0 (3.8)	7.6 (9.4)	3.8 (5.3)	10.6 (13.8)
3.0		3.2 (4.1)	8.2 (10.2)	- (5.4)	10.6 (14.2)
3.0	Ceiling mounting	2.4 (3.4)	7.4 (9.4)	4.5 (5.5)	12.2 (16.0)
4.0	Area illumination	2.4 (3.4)	8.0 (10.4)	4.5 (5.5)	12.6 (17.0)
5.0		2.4 (3.4)	8.4 (11.0)	3.5 (5.5)	12.6 (17.8)
6.0		0.7 (3.4)	8.2 (11.8)	2.7 (5.5)	13.0 (17.4)
7.0		0.7 (3.4)	7.6 (11.8)	0.7 (4.5)	13.2 (18.0)

Emergency Luminaire STYLE 51021 CG-S, 51021



51021 CG-S
with legend foil

Technical data

51021 CG-S, 51021

Viewing distance	17 m
Luminous flux ..E/..N at the end of rated operating time	75 %
Enclosure material	Polycarbonate
Weight incl. cover	0.6 kg
Enclosure colour	Grey
Type of mounting	Ceiling mounting
Dimensions (mm) (L x H x D)	342 x 95 x 124.5
Connection terminals	Loop terminals 3 x 2.5 mm ²
Voltage range	230 V 50/60 Hz, 220 V DC +25/-20%
Current consumption (220 V battery)	30 mA
Power consumption	16 VA
Permissible temperature range	-10°C to + 40°C
Lamp	8 W/T16, 450 lm
Insulation class	II
Degree of protection	IP 41 (IP 54 kit for electronics and lamp, optional)

Ordering details

Type	Scope of supply	Order No.
51021 CG-S acc. DIN 4844	Luminaire enclosure with high cover, quick-mounting set and 3 self-adhesive legend foils PL/PR/PU, with CEWA GUARD monitoring and 20 digit address switch	4 0071 348 171
51021 acc. DIN 4844	Luminaire enclosure with high cover, quick-mounting set and 3 self-adhesive legend foils PL, PR and PU	4 0071 348 430
51021 CG-S	Luminaire enclosure with high cover, quick-mounting set and 3 self-adhesive legend foils PL/PR/PU, with CEWA GUARD monitoring and 20 digit address switch	4 0071 352 707
51021	Luminaire enclosure with high cover, quick-mounting set and 3 self-adhesive legend foils PL, PR and PU	4 0071 352 706

Accessories

Accessories see page 1/20

Dimensions (mm)

