



Emergency Luminaire STYLE 21011 CG-S, 21011

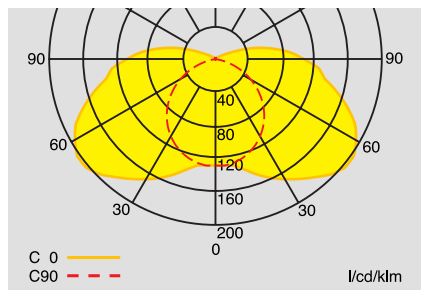

21011 CG-S
with clear IP 54 cover

Dimensions (mm)

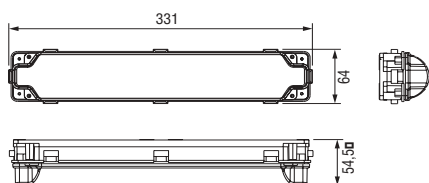

**Polar curve 21011 CG-S
with clear cover IP 54**

Technical data

21011 CG-S, 21011

Luminous flux ... ϵ ... n at the end of rated operating time	75 %
Enclosure material	Polycarbonate
Weight incl. cover	0,6 kg
Enclosure colour	Grey
Type of mounting	Wall and ceiling mounting
Connection terminals	Loop terminals 3 x 2.5 mm ²
Dimensions (mm) (L x H x D)	331 x 64 x 54.5
Voltage range	230 V 50/60 Hz, 220 V DC +25/-20%
Current consumption (220 V battery)	30 mA
Power consumption	16 VA
Permissible temperature range	-10°C to + 40°C
Lamp	8 W/T16, 450 lm
Insulation class	II
Degree of protection	IP 54

Ordering details

Type	Scope of supply	Order No.
21011 CG-S	Luminaire enclosure with IP 54 cover, with quick-mounting set, with CEWA GUARD monitoring and 20 digit address switch	4 0071 348 160
21011	Luminaire enclosure with IP 54 cover, with quick-mounting set	4 0071 348 575

Accessories

Accessories see page 1/20

Lighting engineering (with 8 W/T16, 450 lm lamp)

Measuring level: 0.02 m, incl. 25 % ageing factor

Engineering help 21011 CG-S with IP 54 cover for $E = 1.25 \text{ lx} / 0.625 \text{ lx}$

Mounting height (m)	Types of mounting	Mounting distances (m)			
		L1	L2	L3	L4
2.5	Ceiling mounting	2.7 (3.4)	6.8 (8.4)	3.8 (5.0)	10.0 (12.4)
3.0	Escape route centre	2.7 (3.6)	7.2 (9.2)	3.9 (5.2)	10.4 (13.2)
4.0		2.6 (3.8)	7.6 (10.0)	3.8 (5.5)	11.0 (14.6)
5.0		2.0 (3.8)	7.4 (10.6)	3.2 (5.5)	10.8 (15.4)
6.0		0.6 (3.5)	6.8 (10.8)	0.8 (5.1)	10.0 (15.6)
7.0		0.1 (2.8)	5.2 (10.6)	0.1 (4.5)	8.6 (15.2)
2.0	Wall mounting	2.4 (3.0)	6.0 (7.0)	2.7 (3.4)	6.8 (8.2)
2.5		2.4 (3.0)	6.0 (7.2)	2.4 (3.3)	6.6 (8.2)
3.0		2.2 (2.9)	5.8 (7.4)	0.1 (3.0)	6.0 (8.0)
3.0	Ceiling mounting	2.6 (3.4)	7.4 (9.2)	3.3 (4.5)	9.8 (12.2)
4.0	Area illumination	2.4 (3.6)	7.8 (10.2)	3.5 (4.3)	11.0 (13.8)
5.0		1.9 (3.4)	8.0 (10.8)	2.6 (4.5)	11.6 (15.0)
6.0		0.7 (2.4)	7.6 (11.2)	0.7 (5.5)	11.6 (15.8)
7.0		0.7 (2.5)	7.4 (11.2)	0.7 (3.4)	10.0 (16.4)