

Explosion Protected Emergency Luminaire dKLK 23 CG-S



Technical data

dKLK 23 CG-S

Viewing distance (with exit cube)	40 m
Marking to RL 94/9/EG	Ex II 2 G / Ex II 2 D
Type of protection	EEx de IIC T6
EC-Type Examination Certificate	PTB 04 ATEX 1017X
Enclosure material	Polyester reinforced
Protective cover	Polycarbonate
Rated voltage	AC: 230 V +/- 10 %, 50-60 Hz DC: 220 V + 25 % / - 20 %
Power	max. 25 mA
Protection category to EN 60529	IP 66
Insulation class	I
Permissible ambient temperature	-20 °C to max. +45 °C (depends on lamp power and mounting position)
Power connection	flameproof inlet eXLink, 3pole
Connector (enclosed)	2 + PE cage clamp for cables from Ø 8-11 mm and max. 1.5 mm² (rigid)
Lamps	Compact fluorescent with integrated EVG, socket E27, power 5-8 W, Brand: Philips PLE-C PRO or equal
Weight	approx. 1.7 kg



dKLK 23 CG-S with eXLink



dKLK 23 CG-S



Exit cube for
dKLK 23 CG-S



Ordering details



Type	Scope of supply	Order No.
dKLK 23 CG-S with eXLink	Luminaire with CEWA Guard monitoring and address switch, without lamp, with eXLink	GHG 871 2001 R 0001
dKLK 23 CG-S	Luminaire with CEWA Guard monitoring and address switch, without lamp, with flameproof cable gland	GHG 871 2001 R 0101



Accessories

Type	Scope of supply	Order No.
Cube	Exit cube (242 x 227 x 242) Viewing distance 40 m	4 0071 344 115

Dimensions in mm

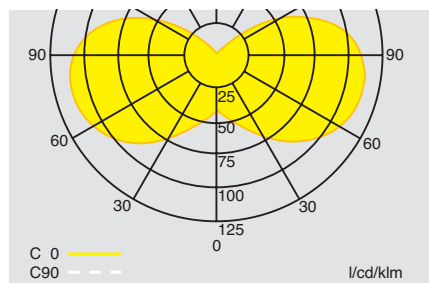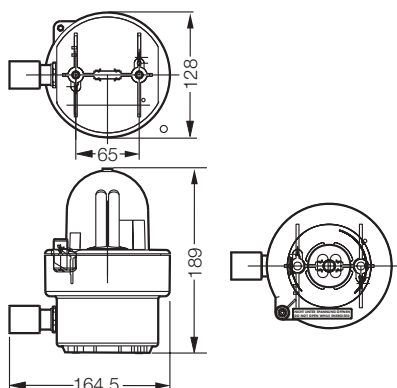

Polar curve dKLK 23 CG-S