













Emergency Luminaire ARC 314 CG-S 324 CG-S

Technical data

314 CG-S, 324 CG-S

Viewing distance		18 m
Enclosure material		Sheet steel
Weight incl. panels	314 CG-S	1.18 kg
	324 CG-S with Single pendulum	2.00 kg
Enclosure colour		white, chrome or brass
Type of mounting	314 CG-S	Wall mounting
	324 CG-S	Single pendulum
Dimensions (mm) (L x H x D)	314 CG-S	220 x 110 x 70
	324 CG-S	220 x 110 x 85 without mounting accessories
Connection terminals		Loop terminals 3 x 2.5 mm ²
Voltage ranges		230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption (220 V battery)		20 mA
Power consumption		10 VA
Permissible temperature range		-10°C to + 40°C
Lamp		4 W/T16
Insulation class		I
Degree of protection		IP 20

Ordering details

Type	Scope of supply	Order No.
314 CG-S	Luminaire enclosure white with CEWA GUARD monitoring and 20 digit address switch, without panel	4 0071 341 910
314 CG-S	Luminaire enclosure chrome with CEWA GUARD monitoring and 20 digit address switch, without panel	4 0071 341 911
314 CG-S	Luminaire enclosure brass with CEWA GUARD monitoring and 20 digit address switch, without panel	4 0071 341 912
Panel PL	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 126
Panel PR	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 127
Panel PU	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 128
Panel PL	Single-sided silk screened legend 	4 0071 349 971
Panel PR	Single-sided silk screened legend 	4 0071 349 970
Panel PU	Single-sided silk screened legend 	4 0071 349 972
324 CG-S*	Luminaire enclosure white with CEWA GUARD monitoring and 20 digit address switch, with pendel without panels	4 0071 341 913
324 CG-S*	Luminaire enclosure chrome with CEWA GUARD monitoring and 20 digit address switch, with pendel without panels	4 0071 341 914
324 CG-S*	Luminaire enclosure brass with CEWA GUARD monitoring and 20 digit address switch, with pendel without panels	4 0071 341 915
Panel PL	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 126
Panel PR	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 127
Panel PU	Single-sided silk screened legend acc. DIN 4844 	4 0071 352 128
Panel PL	Single-sided silk screened legend 	4 0071 349 971
Panel PR	Single-sided silk screened legend 	4 0071 349 970
Panel PU	Single-sided silk screened legend 	4 0071 349 972
Blind panel		4 0071 349 973
Clear panel		4 0071 349 974

* Each luminaire requires 2 panels.




314 CG-S




324 CG-S


Dimensions in mm

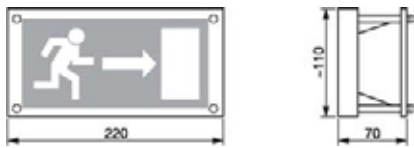


314 CG-S

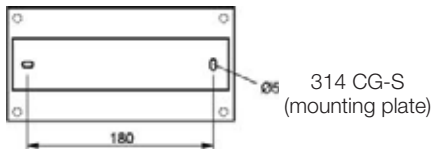

314 CG-S
(mounting plate)

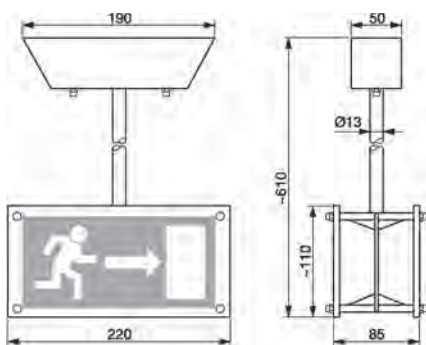

324 CG-S

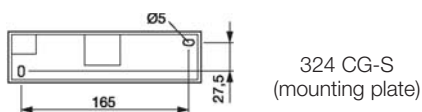

324 CG-S
(mounting plate)