



GuideLed SL CG-S recessed mounting



- Safety luminaire in LED technology for recessed mounting.
- Low installation depth of only 36 mm.
- Almost flush appearance on the ceiling ensured by optics integrated in the luminaire.
- High spacing by double optics technology and highly efficient HighPower LEDs.
- Up to 29 m from luminaire to luminaire with optics for escape route illumination.
- Up to 13 m from luminaire to luminaire with optics for open area illumination.
- Minimum service requirement due to high service life of the LEDs (50 000 hours).

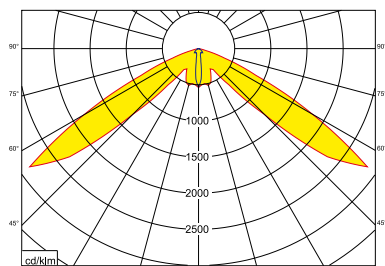

GuideLed SL 13011 CG-S recessed installation with asymmetric optics

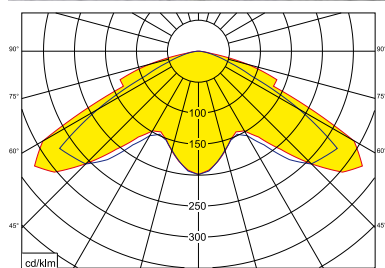

GuideLed SL 13021 CG-S recessed installation with symmetric optics

Luminous flux Φ_e / Φ nominal at the end of the rated service time	100%
Housing material	PC, PMMA, aluminium
Housing colour	White RAL 9010
Weight	0.44 kg
Type of mounting	Recessed mounting
Connection terminal	Clamp terminal 2.5 mm ²
Voltage ranges	220-240 VAC, 50 Hz 176-275 VDC
Current consumption - battery operation	21.5 mA
Connected load - mains operation (apparent power / effective power)	8.5 VA / 5.0 W
Permissible ambient temperature	-20° Celsius to +40° Celsius
Lamp	HighPower LEDs 2 x 2 W

Order data

Scope of delivery	Order No.
GuideLed SL 13011 CG-S recessed mounting with asymmetric optics for escape route illumination, LED supply and CG-S technology (20 addresses) in housing with strain relief	40071353570
GuideLed SL 13021 CG-S recessed mounting with symmetric optics for anti-panic / open area illumination, LED supply and CG-S technology (20 addresses) in housing with strain relief	40071353571

