

# Emergency Luminaire 6011.1 CG-S, 6011.1





6011.1 CG-S



6011.1 CG-S  
with legend foil

Dimensions (mm)

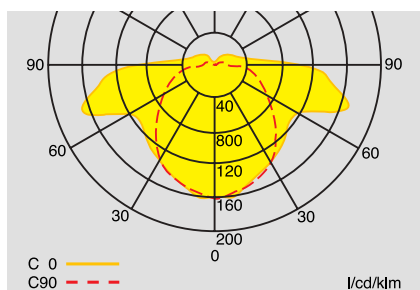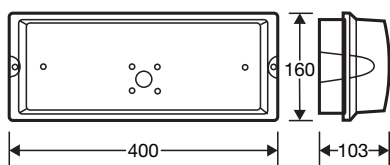

Polar curve SL 6011.1 CG-S  
and SL 6011.1

## Technical data

### 6011.1 CG-S, 6011.1

<b>Viewing distance</b>	<b>26 m</b>
Luminous flux $\Phi_E/\Phi_N$ at the end of rated operating time	75 %
Enclosure material	Polycarbonate
Weight incl. cover	1.4 kg
Enclosure colour	Light grey
Type of mounting	Wall and ceiling mounting
Dimensions (mm) (L x H x D)	400 x 160 x 103
Connection terminals	Loop terminals 3 x 2.5 mm <sup>2</sup>
Voltage ranges	230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption (220 V battery)	30 mA
Power consumption	16 VA
Permissible temperature range	-10°C to + 40°C
Lamp	8 W/T16, 450 lm
Insulation class	I
Degree of protection	IP 65

## Ordering details

Type	Scope of supply	Order No.
6011.1 CG-S acc. DIN 4844	Luminaire with CEWA GUARD monitoring and 20 digit address switch, with cover incl. 3 legends PL, PR, PU	4 0071 345 076
6011.1 acc. DIN 4844	Luminaire with cover incl. 3 legends PL, PR, PU	4 0071 345 075
6011.1 CG-S	Luminaire with CEWA GUARD monitoring and 20 digit address switch, with cover incl. 3 legends PL, PR, PU	4 0071 352 708
6011.1	Luminaire with cover incl. 3 legends PL, PR, PU	4 0071 352 709

## Accessories

Type	Order No.
Wire guard	4 0071 344 822

## Lighting engineering (with 8 W/T16, 450 lm lamp)

Measuring level: 0.02 m, incl. 25 % ageing factor

Engineering help for SL 6011.1 CG-S and 6011.1 without legend foil  
for  $E = 1.25 \text{ lx}$  (0.625 lx)

Mounting height (m)	Types of mounting	Mounting distances (m)			
		L1	L2	L3	L4
2.5	Ceiling mounting	3.0 (3.9)	7.8 (10.0)	3.5 (5.4)	10.6 (14.4)
3.0	Escape route centre	3.1 (4.2)	8.2 (10.6)	3.5 (5.1)	10.0 (15.2)
4.0		3.2 (4.4)	8.6 (11.4)	3.4 (5.0)	9.8 (14.4)
5.0		3.0 (4.5)	8.8 (12.0)	3.0 (4.9)	9.4 (13.8)
6.0		2.4 (4.4)	8.6 (12.4)	2.3 (4.7)	8.8 (13.6)
7.0		1.0 (4.2)	8.2 (12.4)	1.5 (4.3)	7.8 (13.4)
2.0	Wall mounting	3.3 (4.1)	8.2 (10.0)	3.7 (4.8)	9.6 (12.2)
2.5		3.5 (4.4)	8.8 (10.8)	3.8 (5.0)	10.0 (13.0)
3.0		3.5 (4.6)	9.2 (11.4)	3.8 (5.1)	10.2 (13.4)
3.0	Ceiling mounting	2.4 (3.4)	8.4 (10.8)	4.5 (5.5)	11.2 (15.2)
4.0	Area illumination	2.9 (3.4)	9.4 (11.8)	2.9 (5.5)	10.4 (16.0)
5.0		2.4 (3.4)	9.8 (12.8)	3.5 (5.5)	10.2 (15.0)
6.0		2.0 (3.4)	10.0 (13.6)	1.7 (4.5)	9.8 (14.6)
7.0		0.7 (3.4)	9.8 (13.8)	0.7 (3.5)	9.2 (14.6)