

Exit Luminaire Profile 5001 K CG-S









5001 K CG-S

Technical data


5001 K CG-S

Viewing distance	17 m	
Enclosure material	Cover	plastic
	Enclosure	aluminium
Weight incl. cover	1.14 kg	
Enclosure colour	white/silver	
Type of mounting	Wall mounting	
Dimensions (mm) (L x H x D)	355 x 100 x 65	
Connection terminals	Loop terminals 3 x 2.5 mm ²	
Voltage ranges	230 V 50/60 Hz, 220 V DC +25/-20 %	
Current consumption (220 V battery)	60 mA	
Power consumption	14 W	
Permissible temperature range	-10°C to + 40°C	
Lamp	Incandescent lamp 2 x 7 W	
Insulation class	I	
Degree of protection	IP 20	

Ordering details

Type	Scope of supply	Order No.
5001 K CG-S	Luminaire with CEWA GUARD monitoring and address switch, without cover	4 0071 341 897
Cover PL acc. DIN 4844	Cover with silk screened legend 	4 0071 349 621
Cover PR acc. DIN 4844	Cover with silk screened legend 	4 0071 349 622
Cover PU acc. DIN 4844	Cover with silk screened legend 	4 0071 349 623
Cover PL	Cover with silk screened legend 	4 0071 345 448
Cover PR	Cover with silk screened legend 	4 0071 345 449
Cover PU	Cover with silk screened legend 	4 0071 345 450

Dimensions (mm)

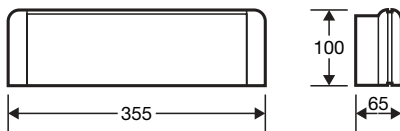

Accessories

Type	Scope of supply	Order No.
Wall bracket	Quick-mounting set for AP-mounting	4 0071 337 878
Wire guard		4 0071 344 822

With 30 % luminous flux ratio during mains operation and 100 % luminous flux ratio during battery operation especially suitable for cinema, theatre etc.