

Self-Contained Luminaire Style Variant 58011 CGLine

Technical data

58011 CGLine

Viewing distance	17 m	
Luminous flux Φ_E/Φ_N at the end of rated operating time	40 %	
Material	Enclosure	Polycarbonate (grey), RAL 7035
Type of mounting	Wall or ceiling mounting	
Dimensions in mm (L x H x D)	340 x 95 x 72	
Weight	58011-1/D	1,15 kg
	58011-3/D	1,35 kg
Battery	rechargeable, maintenance free, gas tight	
Duration of emergency lighting 1 h	NC-Accu 3.6 V / 1.5 Ah	
Duration of emergency lighting 3 h	NC-Accu 3.6 V / 4.0 Ah	
Connection terminals	for 2.5 mm ²	
Rated voltage	230 V 50 Hz	
Power consumption	16 VA	
Lamp	8 W/T16, 450 lm	
Insulation class	II	
Degree of protection	IP 41 (IP 54 Kit for electronics and lamp, optional)	

Permissible temperature range

Maintained mode	-5 °C to +30 °C
Non-maintained mode	0 °C to +35 °C







58011
with cover SL



58011
with cover PU

Dimensions in mm

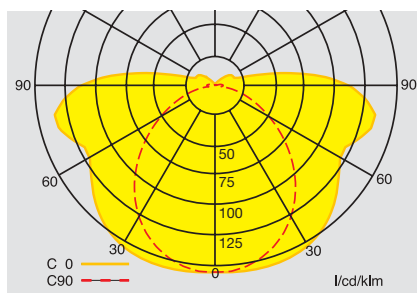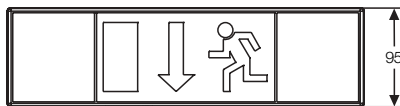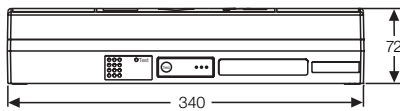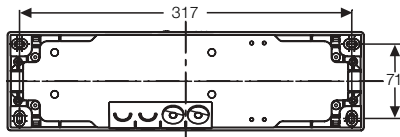

Polar curve 58011
with clear cover

Ordering details

Type	Duration of emergency lighting (h) Battery	Scope of supply	Order No.
58011-1/D CGLine (SET) acc. DIN 4844	1h / 3.6 V/1.5 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 350 142
58011-3/D CGLine (SET) acc. DIN 4844	3h / 3.6 V/4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 350 143
58011-1/D CGLine (SET)	1h / 3.6 V/1.5 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 352 724
58011-3/D CGLine (SET)	3h / 3.6 V/4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 352 725

Accessories

Type	Scope of supply	Order No.
IP 54 Option	IP 54 option	4 0071 350 670

Lighting engineering




Project engineering for 58011 for E = 1.25 lx (0.625 lx) with clear cover

Mounting height (m)	Types of mounting	Mounting distances (m)			
		L1	L2	L3	L4
2.5	Ceiling mounting	2.0 (2.7)	5.4 (6.8)	2.9 (4.2)	8.4 (11.4)
3.0	Escape route centre	1.9 (2.8)	5.6 (7.2)	2.9 (4.2)	8.4 (11.8)
4.0		1.1 (2.7)	5.4 (7.8)	2.2 (4.1)	8.2 (11.8)
5.0		- (2.2)	4.4 (7.8)	- (3.7)	7.4 (11.6)
6.0		- (0.5)	2.0 (7.2)	- (1.8)	3.6 (11.4)
7.0		- (-)	2.0 (6.0)	- (-)	2.0 (10.4)
2.0	Wall mounting	2.1 (2.7)	5.4 (6.8)	2.5 (3.7)	7.4 (10.0)
2.5		2.2 (3.0)	6.0 (7.6)	- (3.7)	7.4 (10.4)
3.0		2.2 (3.1)	6.2 (8.2)	- (-)	7.0 (10.6)

Self-Contained Luminaire Style Variant 58021 CGLine



58021
with cover PU

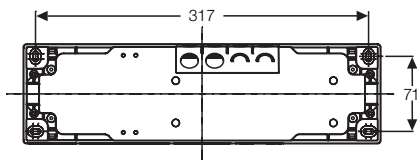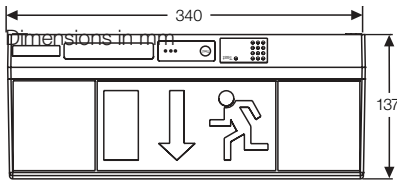

Chain fastening



Wall bracket



IP 54 option

Technical data

58021 CGLine

Viewing distance		17 m
Luminous flux Φ_E/Φ_N at the end of rated operating time		40 %
Material	Enclosure	Polycarbonate (grey), RAL 7035
Type of mounting		Ceiling, chain or wall bracket mounting
Dimensions in mm (L x H x D)		340 x 95 x 137
Weight	58021-1/D	1,30 kg
	58021-3/D	1,55 kg
Battery		rechargeable, maintenance free, gas tight
Duration for emergency lighting 1 h		NC-Accu 3.6 V / 1.5 Ah
Duration for emergency lighting 3 h		NC-Accu 3.6 V / 4.0 Ah
Connection terminals		for 2.5 mm ²
Rated voltage		230 V 50 Hz
Power consumption		16 VA
Lamp		8 W/T16, 450 lm
Insulation class		II
Degree of protection		IP 41 (IP 54 Kit for electronics and lamp, optional)

Permissible temperature range

Maintained mode	-5 °C to +30 °C
Non-maintained mode	0 °C to +35 °C

Ordering details

Type	Duration of emergency lighting (h) Battery	Scope of supply	Order No.
58021-1/D CGLine (SET) acc. DIN 4844	1h / 3.6 V/1.5 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foil PL, PR, PU and automatic test function	4 0071 350 144
58021-3/D CGLine (SET) acc. DIN 4844	3h / 3.6 V/4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foil PL, PR, PU and automatic test function	4 0071 350 145
58021-1/D CGLine (SET)	1h / 3.6 V/1.5 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foil PL, PR, PU and automatic test function	4 0071 352 726
58021-3/D CGLine (SET)	3h / 3.6 V/4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foil PL, PR, PU and automatic test function	4 0071 352 727

Accessories

Type	Scope of supply	Order No.
Wall bracket		4 0071 350 668
Chain fastening		4 0071 350 669
IP 54 Option	IP 54 Option	4 0071 350 670