

LED-Self-Contained Luminaire Style Variant 58011 1-3/D LED CGLine 58021 1-3/D LED CGLine






58011 1-3/D LED CGLine
with legend PU






58021 1-3/D LED CGLine
with legend PU

Dimensions in mm

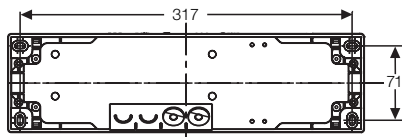

58011 1-3/D LED CGLine

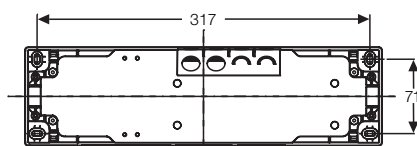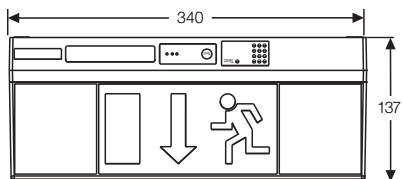

58021 1-3/D LED CGLine

Technical data

58011 LED CGLine

Viewing distance EN 1838		17 m
Luminous flux Φ_E/Φ_N at the end of rated operating time		1 h – 50 % 3 h – 20 %
Material	Enclosure	Polycarbonate (grey), RAL 7035
Type of mounting		Wall or ceiling mounting
Dimensions in mm (L x H x D)	58011 1-3/D LED	340 x 95 x 72
	58021 1-3/D LED	340 x 95 x 137
Weight	58011 1-3/D LED	0,75 kg
	58021 1-3/D LED	0,90 kg
Battery		rechargeable, maintenance free, gas tight
Duration of emergency lighting 1 h or 3 h*		NiMH-Accu 4.8 / 1.8 Ah
Connection terminals		for 2.5 mm ²
Rated voltage		230 V 50 Hz
Power consumption		12.8 VA
Lamp		4 x 1 W LED
Insulation class		II
Degree of protection		IP 41
Permissible temperature range		
		Maintained mode –5 °C to +30 °C
		Non-maintained mode 0 °C to +35 °C

* Duration of emergency lighting selctable via battery selector switch.

Ordering details

Type	Scope of supply	Order No.
58011 1-3/D CGLine (SET) acc. DIN 4844	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 352 800
58011 1-3/D CGLine (SET) acc. DIN 4844	Luminaire enclosure incl. cover 3 self-adhesive legend foils PL, PR and PU and automatic test function	4 0071 352 801

Accessories

Type	Order No.
Chain fastening	4 0071 350 669
Wall bracket	4 0071 350 668



Kettenbefestigung



Wandausleger