

LED-Self-Contained Luminaire Brillant

1883 1-3/D LED CGLine

1884 1-3/D LED CGLine

1984 1-3/D LED CGLine

Technical data

1883 1-3/D LED CGLine, 1884 1-3/D LED CGLine, 1984 1-3/D LED CGLine

Viewing distance	1883 = 20 m / 1884 = 28 m / 1984 = 28 m	
Luminous flux Φ_E/Φ_N at the end of rated operating time	1 h – 50 % 3 h – 20 %	
Enclosure material	sheet steel	
Type of mounting	1883/1884	recessed ceiling mounting
	1984	surface ceiling mounting
Dimensions (mm) (L x H x D)	see dimensional drawings	
Weight incl. cover	1883 1-3/D LED	3.0 kg
	1884 1-3/D LED	4.0 kg
	1984 1-3/D LED	4.0 kg
Battery	rechargeable, maintenance free, gas tight	
Duration of emergency lighting 1 h or 3 h*	NiMh-Accu 4.8 V / 1.1 Ah	
Connection terminals	for 2.5 mm ²	
Rated voltage	230 V 50 Hz	
Power consumption	12.8 VA	
Lamp	4 x 1 W LED	
Insulation class	I	
Degree of protection	IP 20	
Permissible temperature range		
	Maintained mode	-5 °C to +30 °C
	Non-maintained mode	0 °C to +35 °C

* Duration of emergency lighting selectable via battery selector switch.

Ordering details

Type	Scope of supply	Order No.
1883 1-3/D LED CGLine	Edge luminaire for recessed ceiling mounting, without panel; Scope of supply: plastic bezel white, RAL 9010	4 0071 352 806
1884 1-3/D LED CGLine	Edge luminaire for recessed ceiling mounting, without panel; Scope of supply: plastic bezel white, RAL 9010	4 0071 352 807
1984 1-3/D LED CGLine	Edge luminaire for surface ceiling mounting, without panel; RAL 9010	4 0071 352 808



1883 1-3/D LED CGLine




1884 1-3/D LED CGLine




1984 1-3/D LED CGLine

Dimensions (mm)

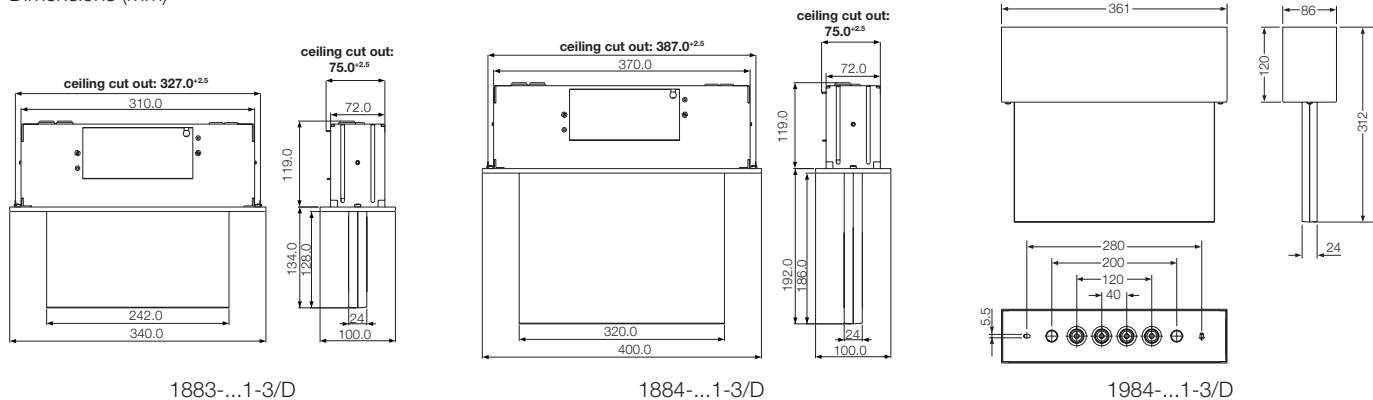

LED-Self-Contained Luminaire Brillant

1883 1-3/D LED CGLine
1884 1-3/D LED CGLine
1984 1-3/D LED CGLine



Panel PL/PR

Ordering details for panels 1883

Type	Scope of supply	Order No.
Panel PL/PR acc. DIN 4844	Double-sided silk screened legend	4 0071 350 943
Panel PU/PU acc. DIN 4844	Double-sided silk screened legend	4 0071 350 944
Panel PU/BL acc. DIN 4844	Double-sided silk screened legend	4 0071 350 945
Panel PL/PR	Double-sided silk screened legend	4 0071 350 940
Panel PU/PU	Double-sided silk screened legend	4 0071 350 941
Panel PU/BL	Double-sided silk screened legend	4 0071 350 942

Accessories




Concrete ceiling box

Type	Scope of delivery	Order No.
Concrete ceiling box for 1883	for installation in concrete ceilings	4 0071 348 725
Mounting set for 1883/1884	for installation in concrete ceiling box	4 0071 341 721







LED-Self-Contained Luminaire Brillant

1883 1-3/D LED CGLine
1884 1-3/D LED CGLine
1984 1-3/D LED CGLine



Panel PL/PR

Ordering details for panels 1884, 1984

Type	Scope of supply	Order No.
Panel PL/PR acc. DIN 4844	Double-sided silk screened legend 	4 0071 350 949
Panel PU/PU acc. DIN 4844	Double-sided silk screened legend 	4 0071 350 950
Panel PU/BL acc. DIN 4844	Double-sided silk screened legend 	4 0071 350 951
Panel PL/PR	Double-sided silk screened legend 	4 0071 350 946
Panel PU/PU	Double-sided silk screened legend 	4 0071 350 947
Panel PU/BL	Double-sided silk screened legend 	4 0071 350 948

Accessories



Concrete ceiling box

Type	Scope of supply	Order No.
Concrete ceiling box for 1884	for installation in concrete ceilings	4 0071 341 710
Mounting set for 1883/1884	for installation in concrete ceiling box	4 0071 341 721
Pendulum set 0.5 m for 1984	with canopy	4 0071 350 517
Wall bracket for 1984 RAL 9010		4 0071 349 910
Wall bracket for 1984 simple construction RAL 9010		4 0071 349 952
Wall parallel mounting bracket for 1984 RAL 9010		4 0071 349 852
Chain suspension for 1984		4 0071 348 723