

Self-Contained Luminaire Style Variant SV EURO 4







SV EURO 4
with cover SL



SV EURO 4
with cover PU

Dimensions in mm

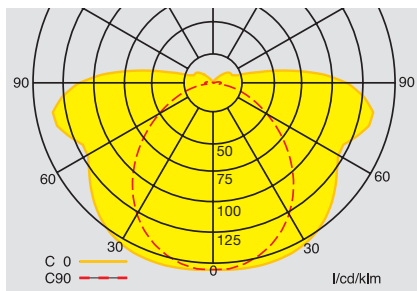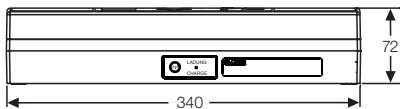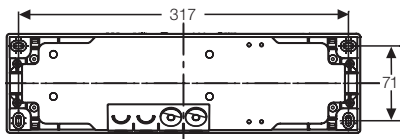

Polar curve SV EURO 4
with clear cover

Technical data

SV EURO 4

Viewing distance		17 m
Luminous flux $\Phi_E / \Phi_{E, Nenn}$ at the end of rated operating time		40 %
Material	Enclosure	Plastic (grey), RAL 7035
	Cover	Plastic
Type of mounting		Wall or ceiling mounting
Dimensions in mm (L x H x D)		340 x 95 x 72
Weight	SV EURO 4-3/D	1,3 kg
Battery		rechargeable, maintenance free, gas tight
Duration of emergency lighting 3 h		NC-Accu 4.0 Ah
Connection terminals		for 2.5 mm ²
Rated voltage		230 V 50 Hz
Power consumption		16 VA
Lamp		8 W/T16
Insulation class		II
Degree of protection		IP 41 (IP 54 Kit for electronics and lamp, optional)

Permissible temperature range

Maintained mode	-5 °C to +30 °C
Non-maintained mode	0 °C to +35 °C

Ordering details

Type	Duration of emergency lighting (h) Battery	Scope of supply	Order No.
SV EURO 4-3/D (SET)	3h / 4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foils PR, PL, PU and test button	4 0071 350 139

Accessories




Type	Scope of supply	Order No.
IP 54 Option	IP 54 option	4 0071 350 670

Self-Contained Luminaire Style Variant SV EURO 4L



SV EURO 4L
with cover PU

Dimensions in mm

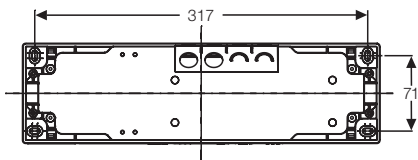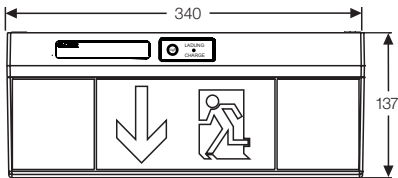

Chain fastening



Wall bracket

Technical data


SV EURO 4L

Viewing distance		17 m
Luminous flux $\Phi_E / \Phi_{E, Nenn}$ at the end of rated operating time		40 %
Material	Enclosure Cover	Plastic (grey), RAL 7035 Plastic
Typ of mounting		Ceiling, chain or wall bracket mounting
Dimensions in mm (L x H x D)		340 x 95 x 137
Weight	SV EURO 4L-3/D	1,5 kg
Battery		rechargeable, maintenance free, gas tight
Duration for emergency lighting 3 h		NC-Accu 4.0 Ah
Connection terminals		for 2.5 mm ²
Rated voltage		230 V 50 Hz
Power consumption		16 VA
Lamp		8 W/T16
Insulation class		II
Degree of protection		IP 41 (IP 54 Kit for electronics and lamp, optional)

Permissible temperature range

Maintained mode	-5 °C to +30 °C
Non-maintained mode	0 °C to +35 °C

Ordering details

Type	Duration of emergency lighting (h) Battery	Scope of supply	Order No.
SV EURO 4L-3/D (SET)	3h / 4.0 Ah	Luminaire enclosure incl. cover 3 self-adhesive legend foil PR, PL, PU and test button 	4 0071 350 141

Accessories

Type	Scope of supply	Order No.
Wall bracket		4 0071 350 668
Chain fastening		4 0071 350 669
IP 54 Option	IP 54 Option	4 0071 350 670