


Group Battery System CG 2000 Technical Data

Remote switch

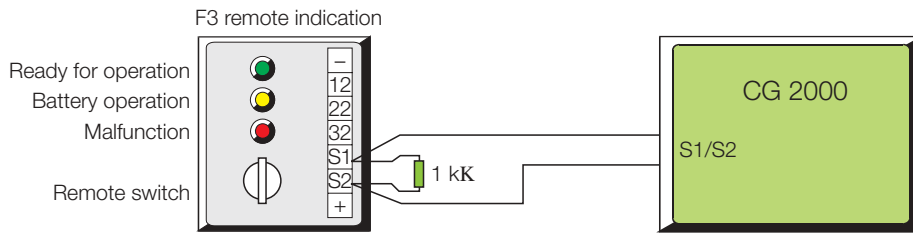

Control loop for blocking the installation during idle periods with differential loop monitoring for the **detection of short circuits or open lines.**

Differential monitoring:	In the event of a short circuit or open line the installation is released.
F3 switch closed:	Installation ready for operation
F3 switch closed (1 kK):	Installation blocked



F3 remote indication

F3 remote indication

Operating from a battery supply, the F3 remote indication ensures the display of important operational information also in a mains fail condition. By means of the built-in key-operated switch, the connected CG 2000 cover can be

centrally put out of operation. Thereby, the F3 remote indication complies with DIN VDE 0108 part 1, para. 6.4.3.11 which permits a remote control only if the operation by unauthorized persons is prevented.

Technical data

Connection terminals	2.5 mm ² rigid and flexible
Dimensions (mm) (h x w x d)	160 x 80 x 55

Ordering details

Type	Scope of supply	Order No.
F3 remote indication	Module	4 0071 338 497