

Star-delta timer relay

**Technical data**

**Star-delta timer relay**


Marking to 94/9/EC	Ⓔ II 2 G Ex de IIC / Ⓔ I M 2 Ex de I	
EC Type Examination Certificate	PTB 98 ATEX 1087 U	
IECEX Certificate of Conformity	IECEX BK1 07.0038 U	
Marking accd. to IECEx	Ex de IIC	
Application temperature <sup>1)</sup>	-20 °C to +40 °C	
Rated voltage	max. 250 V	
Rated switching capacity	110 V - 127 V AC; 220 V - 240 V AC; 24 V AC/DC	
Rated continuous I <sub>n</sub>	3 A	
Power dissipation per pole	2 W	
Rated switching capacity AC 15	230 V/3 A	
Tripping time	1.5 s to 30 s continuously externally adjustable	
Terminal cross-section	Main contact	2 x 10 mm <sup>2</sup> fine wire with wire end sleeve/single wire
	Auxiliary contact/ Coil connection	2 x 2.5 mm <sup>2</sup> fine wire with wire end sleeve/single wire
Dimensions (L x W x H)	Mounting width 35 mm	
Weight	0.53 kg size 0	
Enclosure material	Glass-fibre reinforced polyester	
Enclosure colour	black	
Options	Auxiliary contact	

<sup>1)</sup> Depend on installation

**Ordering details**

Version	Rated current	Response time	Mounting width	Order No.
Type: 1-pole Equipped with 1 change-over				
1-pole	3 A	1,5 s - 30 s	35 mm	<b>GHG 618 1102 R 0001</b>

**Dimension drawing | Termination diagram**

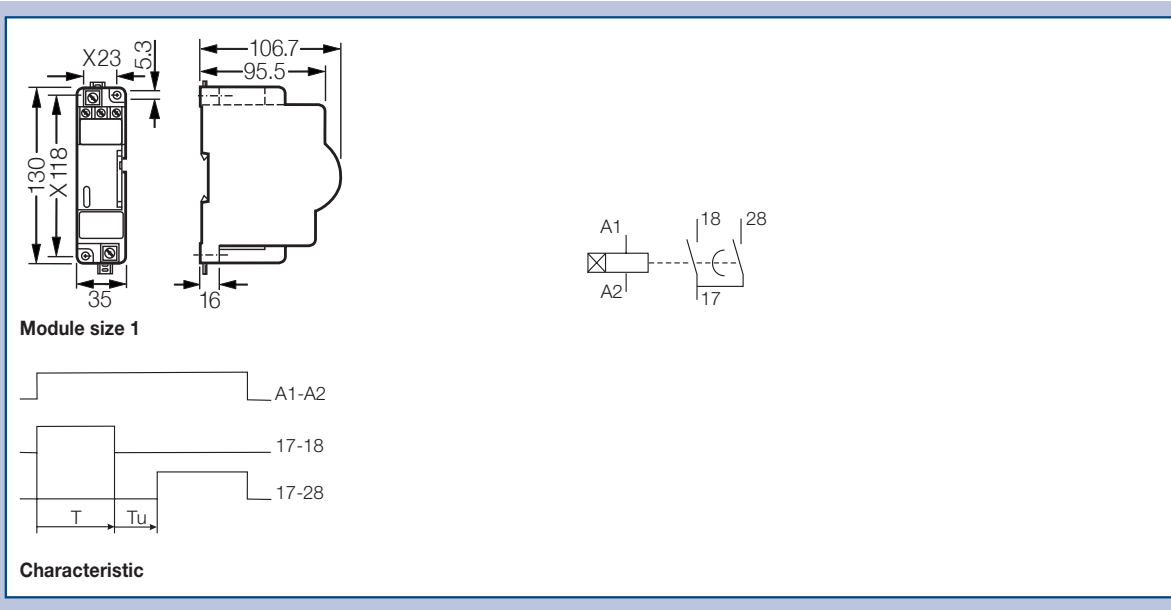

Dimensions in mm