


Ex-Pendant light fittings

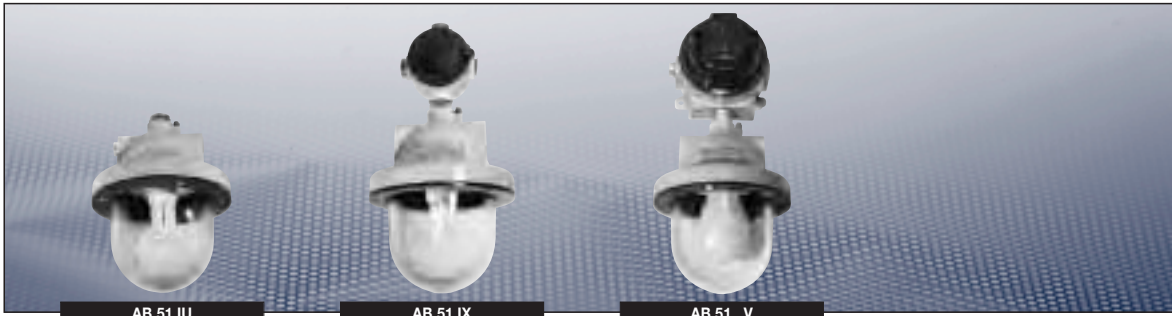

Ordering details

Type	Lamp	Entry thread	Cable gland for cable Ø	Blanking plug	Weight	Order No.
(T ambient -20 °C to +55 °C)						
AB 51 IU (direct entry)	all	2 x 3/4"	–	1 x 3/4" Ex-d	3.6 kg	NOR 000 115 110 396
AB 51 IX (indirect entry)	all	2 x M25 x 1.5	–	1 x M25 Ex-e	4.5 kg	NOR 000 115 110 437
AB 51 M 125 V (direct entry) ²⁾	125 W HME	2 x 3/4"	–	1 x 3/4" Ex-d	7.5 kg	NOR 000 115 110 890
AB 51 S 70 V (direct entry) ²⁾	70 W HSE	2 x 3/4"	–	1 x 3/4" Ex-d	7.5 kg	NOR 000 115 110 903

(T ambient -50 °C to +55 °C)						
AB 51 IU (direct entry)	all	2 x 3/4"	–	1 x 3/4" Ex-d	3.6 kg	NOR 000 115 110 397
AB 51 IX (indirect entry)	all	2 x M25 x 1.5	–	1 x M25 Ex-e	4.5 kg	NOR 000 115 110 438

(T ambient -45 °C to +55 °C)						
AB 51 M 125 V (direct entry) ²⁾	125 W HME	2 x 3/4"	–	1 x 3/4" Ex-d	7.5 kg	NOR 000 115 110 891
AB 51 S 70 V (direct entry) ²⁾	70 W HSE	2 x 3/4"	–	1 x 3/4" Ex-d	7.5 kg	NOR 000 115 110 870



Lamps and fixing accessories are not included

²⁾ including flameproof enclosure with complete control gear

Accessories

AB 51		
Type	Version	Order No.
Spare glass with metal ring	for AB 51	NOR 000 115 110 873
Wire guard	for AB 51	NOR 000 005 110 860
External reflector	for AB 51	NOR 000 005 110 894
Ceiling bracket ANSI 316	for AB 51..	NOR 003 165 110 000
Eye bolt ANSI 316	for AB 51..	NOR 003 165 110 001

Dimensions drawing | Polar curve

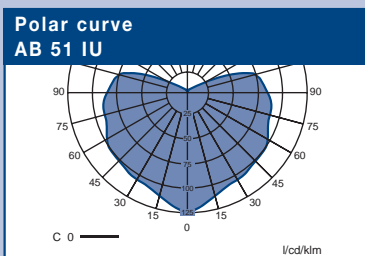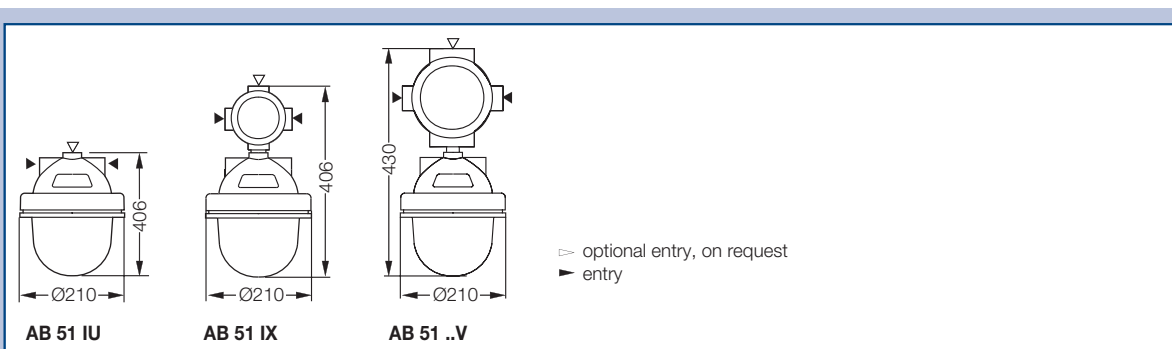

Dimensions in mm