

AB 12 NAV 70

**Ordering details**

Type	Entry thread	Cable gland Ex-d for cable Ø	Blanking plug Ex-d	Qty.	Order No.
Group IIC - NORMAL (ambient temperature) (-20 °C to +55 °C)					
AB 12 NAV 70 + PE	2 x 3/4"	9 - 14	1 x 3/4"	1	NOR 000 005 060 071
AB 12 NAV 70	2 x 3/4"	-	1 x 3/4"	1	NOR 000 005 060 070
Group IIB - LOW (ambient temperature) (up to -45 °C)					
AB 12 NAV 70	-	-	1 x 3/4"	1	NOR 000 005 060 072


Lamps and fixing accessories are not included

**Accessories**

AB 12 NAV 70	
Type	Order No.
Ceiling bracket D 92 with screws and polyamide washer (CrNi, 2 pcs.)	2 2480 092 000
Ceiling bracket A5 hot galvanized (1 pc.)	NOR 000 005 009 162
Wall bracket 45° hot galvanized (1 pc.)	NOR 000 005 009 196
Reflector RAB 108 (AISI 304)	NOR 003 045 060 471
Reflector RAB 108 (AISI 304) + guard (steel white epoxy coating)	NOR 003 045 060 819
Reflector RAB 108 (AISI 316)	NOR 003 165 060 471
Reflector RAB 108 (AISI 316) + guard (steel white epoxy coating)	NOR 003 165 060 819

**Dimensions drawing | Polar curve**

AB 12 NAV 70

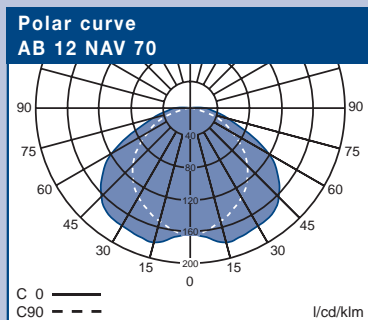

Dimensions in mm