


Locking device

Metal

Plastic

Ordering key eXLink coupler 6+1-pole/7-pole

GHG 572 3XXX RXX0X

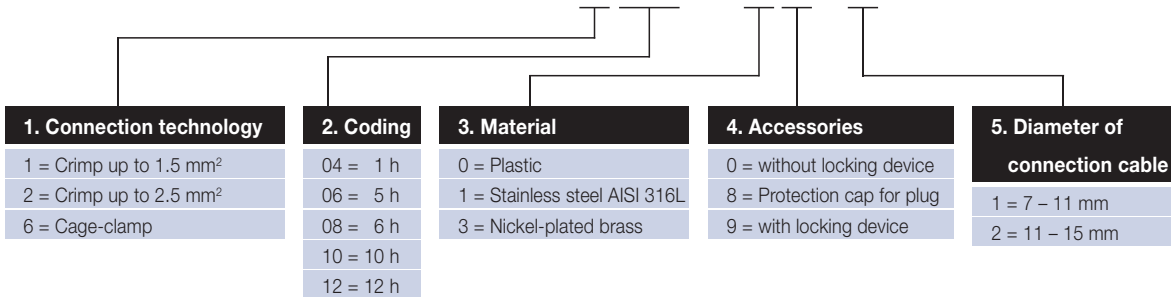

Ordering details

Voltage	No. of poles	Coding	Connection	Diameter of connection cable	
				7 – 11 mm Order No.	11 – 15 mm Order No.
Coupler made of plastic version					
110 V AC	6-pol + PE	4 h	Crimp up to 1.5 mm ²	GHG 572 3104 R0001	GHG 572 3104 R0002
110 V AC	6-pol + PE	4 h	Crimp up to 2.5 mm ²	GHG 572 3204 R0001	GHG 572 3204 R0002
110 V AC	6-pol + PE	4 h	Cage clamp	GHG 572 3604 R0001	GHG 572 3604 R0002
230 V AC	6-pol + PE	6 h	Crimp up to 1.5 mm ²	GHG 572 3106 R0001	GHG 572 3106 R0002
230 V AC	6-pol + PE	6 h	Crimp up to 2.5 mm ²	GHG 572 3206 R0001	GHG 572 3206 R0002
230 V AC	6-pol + PE	6 h	Cage clamp	GHG 572 3606 R0001	GHG 572 3606 R0002
24 V DC	7-pol	8 h	Crimp up to 1.5 mm ²	GHG 572 3108 R0001	GHG 572 3108 R0002
24 V DC	7-pol	8 h	Crimp up to 2.5 mm ²	GHG 572 3208 R0001	GHG 572 3208 R0002


Coupler made of nickel-plated brass					
110 V AC	6-pol + PE	4 h	Crimp up to 1.5 mm ²	GHG 572 3104 R3001	GHG 572 3104 R3002
110 V AC	6-pol + PE	4 h	Crimp up to 2.5 mm ²	GHG 572 3204 R3001	GHG 572 3204 R3002
110 V AC	6-pol + PE	4 h	Cage clamp	GHG 572 3604 R3001	GHG 572 3604 R3002
230 V AC	6-pol + PE	6 h	Crimp up to 1.5 mm ²	GHG 572 3106 R3001	GHG 572 3106 R3002
230 V AC	6-pol + PE	6 h	Crimp up to 2.5 mm ²	GHG 572 3206 R3001	GHG 572 3206 R3002
230 V AC	6-pol + PE	6 h	Cage clamp	GHG 572 3606 R3001	GHG 572 3606 R3002

Coupler made of stainless steel					
110 V AC	6-pol + PE	4 h	Crimp up to 1.5 mm ²	GHG 572 3104 R1001	GHG 572 3104 R1002
110 V AC	6-pol + PE	4 h	Crimp up to 2.5 mm ²	GHG 572 3204 R1001	GHG 572 3204 R1002
110 V AC	6-pol + PE	4 h	Cage clamp	GHG 572 3604 R1001	GHG 572 3604 R1002
230 V AC	6-pol + PE	6 h	Crimp up to 1.5 mm ²	GHG 572 3106 R1001	GHG 572 3106 R1002
230 V AC	6-pol + PE	6 h	Crimp up to 2.5 mm ²	GHG 572 3206 R1001	GHG 572 3206 R1002
24 V DC	7-pol	8 h	Crimp up to 1.5 mm ²	GHG 572 3108 R1001	GHG 572 3108 R1002
24 V DC	7-pol	8 h	Crimp up to 2.5 mm ²	GHG 572 3208 R1001	GHG 572 3208 R1002
400 V AC	6p + PE	10 h	Crimp up to 1.5 mm ²	GHG 572 3110 R1001	GHG 572 3110 R1002
400 V AC	6p + PE	10 h	Crimp up to 2.5 mm ²	GHG 572 3210 R1001	GHG 572 3210 R1002
24 V AC	6p + PE	12 h	Crimp up to 1.5 mm ²	GHG 572 3112 R1001	GHG 572 3112 R1002
24 V AC	6p + PE	12 h	Crimp up to 2.5 mm ²	GHG 572 3212 R1001	GHG 572 3212 R1002

Cooper Crouse-Hinds © 2009 - all rights reserved

1
2
3
4
5
6
7
8
9
10
11
12

| eXLink 7-pole/6-pole + PE |

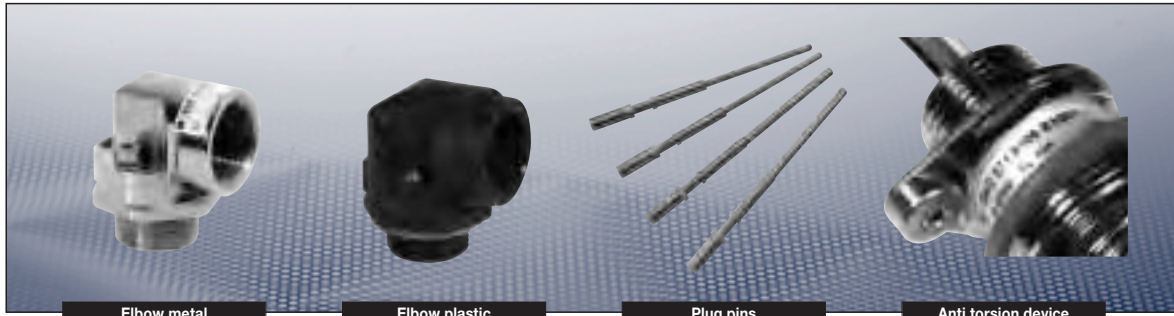

Elbow metal

Elbow plastic

Plug pins

Anti torsion device

Ordering key eXLink elbow

GHG 572 1000 RX001

Material


- 0 = Plastic
- 1 = Stainless steel AISI 316L
- 3 = Nickel-plated brass

Ordering details







Type	Material	Order No.
Elbow M25	Plastic	GHG 572 1000 R0001
Elbow M25	Stainless steel AISI 316L	GHG 572 1000 R1001
Elbow M25	Nickel-plated brass	GHG 572 1000 R3001

Accessories

Type	BE	Order No.
Set of socket contacts 0.5 mm ² , 7-pole	1	GHG 570 1905 R0008
Set of socket contacts 1.5 mm ² , 7-pole	1	GHG 570 1905 R0005
Set of socket contacts 2.5 mm ² , 7-pole	1	GHG 570 1905 R0006
Crimp tool for eXLink	1	GHG 570 1902 R0001
Plastic protection cap connector/receptacle 7-pole	1	GHG 570 1903 R0005
Plastic protection cap plug/inlet 7-pole	1	GHG 570 1903 R0006
Brass protection cap connector/receptacle 7-pole	1	GHG 570 1903 R0007
Brass protection cap plug/inlet 7-pole	1	GHG 570 1903 R0008
Set of plug pins 0.5 mm ² , 6-pole + PE (PE leading AC)	1	GHG 570 1904 R0013
Set of plug pins 0.5 mm ² , 7-pole (lagging DC)	1	GHG 570 1904 R0014
Set of plug pins 1.5 mm ² , 6-pole + PE (PE leading AC)	1	GHG 570 1904 R0007
Set of plug pins 1.5 mm ² , 7-pole (lagging DC)	1	GHG 570 1904 R0008
Set of plug pins 2.5 mm ² , 6-pole + PE (PE leading AC)	1	GHG 570 1904 R0009
Set of plug pins 2.5 mm ² , 7-pole (lagging DC)	1	GHG 570 1904 R0010
Screw driver for cage clamp	1	GHG 570 1908 R0001
Strain relief and seal 7 - 11 mm	1	GHG 570 1907 R0003
Strain relief and seal 11 - 15 mm	1	GHG 570 1907 R0004
Strain relief and seal + PE connection 7 - 11	1	GHG 570 1907 R0005
Strain relief and seal + PE connection 11-15	1	GHG 570 1907 R0006
Anti torsion device	1	GHG 570 1901 R0002

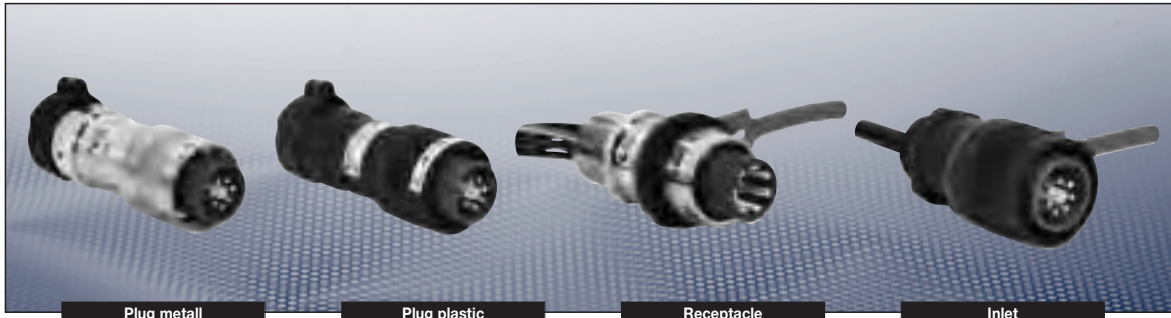

Dimension drawings eXLink 6+1-pole

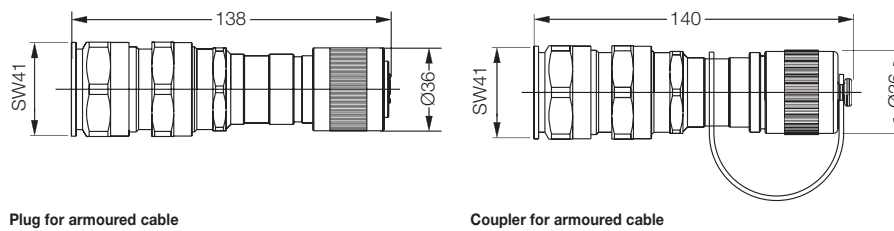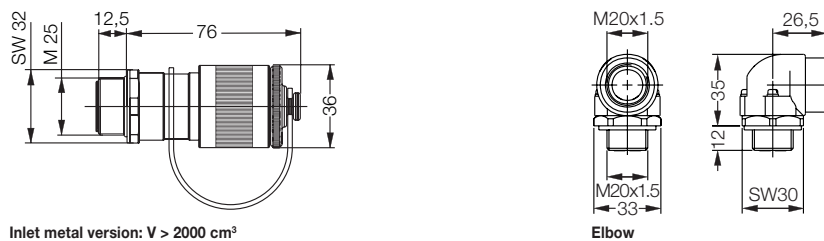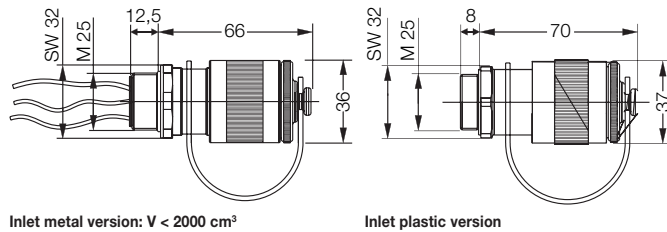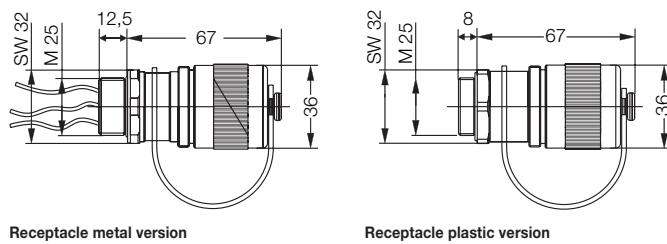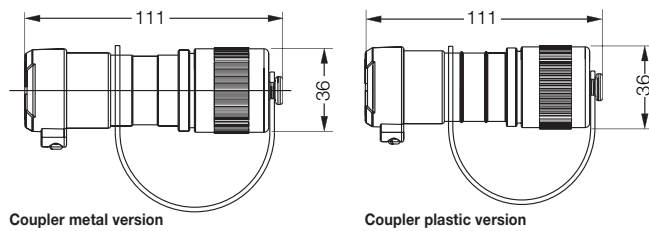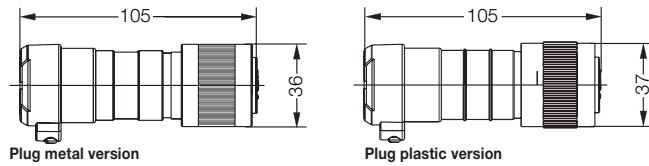

Dimensions in mm

Cooper Crouse-Hinds © 2009 - all rights reserved

1
2
3
4
5
6
7
8
9
10
11
12