



Transformer plug

Technical data


Ex-transformer plug acc. to IEC 60309-1/2, up to 415 V

| | |
|-----------------------------------|---|
| Marking to 94/9/EC | Ⓔ II 2 G Ex ed IIC T5 |
| EC-Type Examination Certificate | PTB 99 ATEX 1039 |
| IECEX type of protection | Ex ed [ia] IIC T6/T5 |
| IECEX certification of conformity | IECEX BKI 04.0002 |
| Permissible ambient temperature | -20 °C to + 40 °C |
| Rated voltage primary | 415 V AC |
| Rated voltage secondary | 12 V, 24 V, 36 V, 42 V or 230 V~ |
| Frequency | 50 - 60 Hz |
| Power consumption | max. 65 VA |
| Back up fuse | 0.5 A mT, replaceable |
| Connecting terminals | 1 x 1 - 4 mm ² |
| Insulation class | I |
| Degree of protection to EN 60529 | IP54 |
| Cable glands | Ø 10 - 20 mm |
| Enclosure material | Glass-fibre reinforced polyester, polyamide |

Ordering details

| Voltage | h | Type | Weight approx. | Sec voltage | Order No. |
|-------------------------------------|---|---------------------------|----------------|-------------|---------------------------|
| 16 A transformer plug 4-pole | | | | | |
| 200-250 V |  | Transformer plug 65 VA | 2.3 kg | 42 V | GHG 531 6469 V0000 |
| | | Transformer plug 65 VA | 2.3 kg | 24 V | GHG 531 6469 V5005 |
| | | Transformer plug 65 VA | 2.3 kg | 12 V | GHG 531 6469 V5025 |
| 16 A transformer plug 5-pole | | | | | |
| 380-415 V |  | Transformer plug 65 VA | 2.3 kg | 42 V | GHG 531 6566 V0000 |
| | | Transformer plug 65 VA | 2.3 kg | 24 V | GHG 531 6566 V5005 |
| | | Transformer plug 65 VA | 2.3 kg | 12 V | GHG 531 6566 V5025 |
| | | Transformer plug 65 VA | 2.3 kg | 230 V | GHG 531 6566 V5023 |
| Plug with fuse | | | | | |
| 200-250 V |  | Plug with fuse max. 6.3 A | 1.3 kg | - | GHG 531 7536 V0000 |
| Accessories | | | | | |
| Plug cap 3/4 pole | | | | | GHG 530 1935 R0002 |
| Plug cap 5 pole | | | | | GHG 530 1935 R0005 |

Dimension drawing

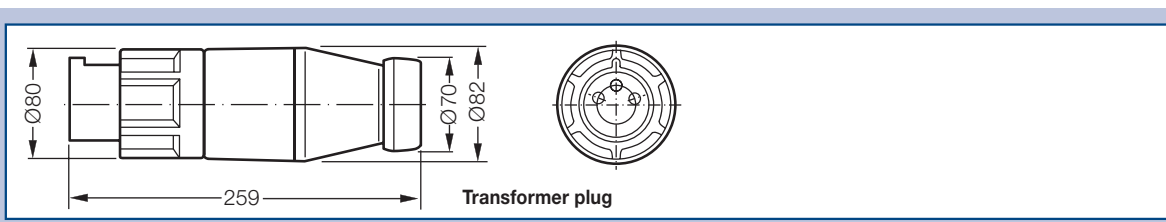

Dimensions in mm