



Ex-cable glands

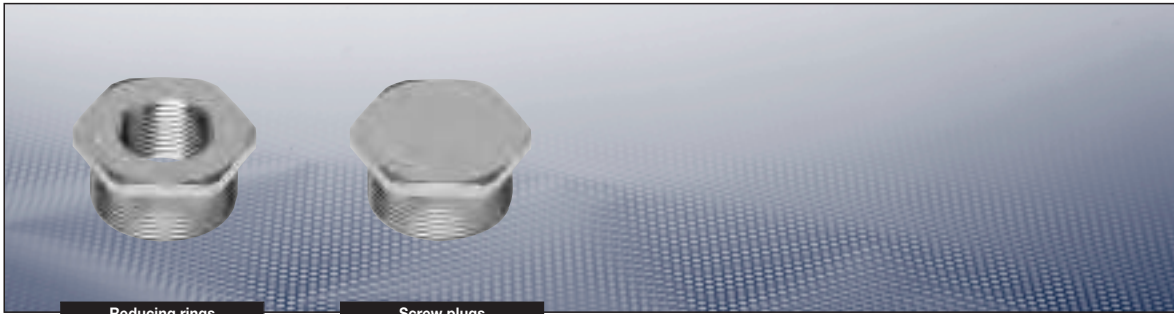

Technical data

Ex-d cable glands metal design Reducing rings Screw plug Adapter ISO-NPT	
Marking to 94/9/EC	Ex II 2 G Ex e II / Ex d IIC / Ex II 2 D Ex tD
EC-Type Examination Certificate	LCIE 98 ATEX 0001 X
Permissible ambient temperature	-40 °C to +100 °C
Degree of protection accd. EN 60529	IP66 / IP68 - 10 bar
Enclosure material	Brass, nickel-plated

Ex-cable glands

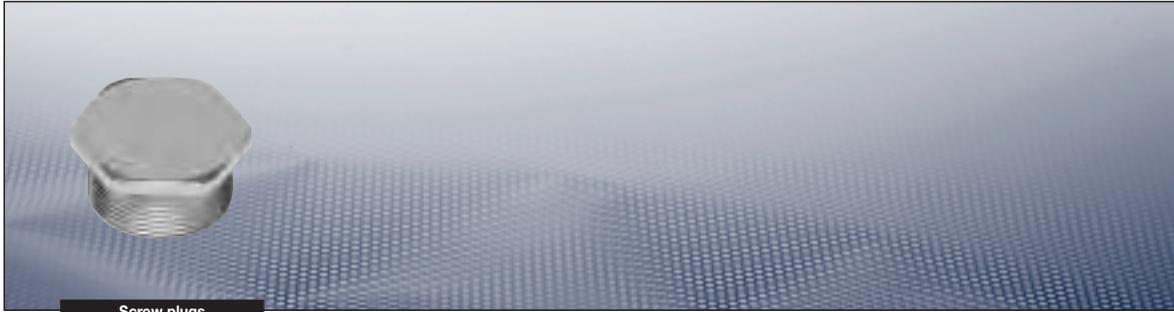

Screw plugs

Ordering details

Thread 1 (male)	A mm	L mm	E mm	Order No.
Screw plug with ISO thread				
M12 x 1.5	14	2.8	15	CAP 190 124
M16 x 1.5	18	3.0	15	CAP 190 164
M20 x 1.5	23	3.0	15	CAP 190 204
M25 x 1.5	28	3.5	15	CAP 190 254
M32 x 1.5	36	4.0	15	CAP 190 324
M40 x 1.5	44	4.0	15	CAP 190 404
M50 x 1.5	54	5.0	16	CAP 190 504
M63 x 1.5	67	5.5	17	CAP 190 634
Screw plug with NPT thread				
1/4 "	14	2.8	12	CAP 190 194
3/8 "	18	2.8	12	CAP 190 294
1/2 "	22	3.0	16	CAP 190 394
3/4 "	28	3.0	16	CAP 190 494
1 "	36	3.5	20	CAP 190 594
1 " 1/4	44	4.0	20	CAP 190 694
1 " 1/2	50	5.0	20	CAP 190 794
2 "	64	5.5	20	CAP 190 894
2 " 1/2	75	6.0	28	CAP 190 994
3 "	90	8.0	30	CAP 191 094
3 " 1/2	110	10.0	32	CAP 191 194
4 "	120	11.0	32	CAP 191 294