


# Ex-Recessed Ceiling Light Fitting RLF 250..

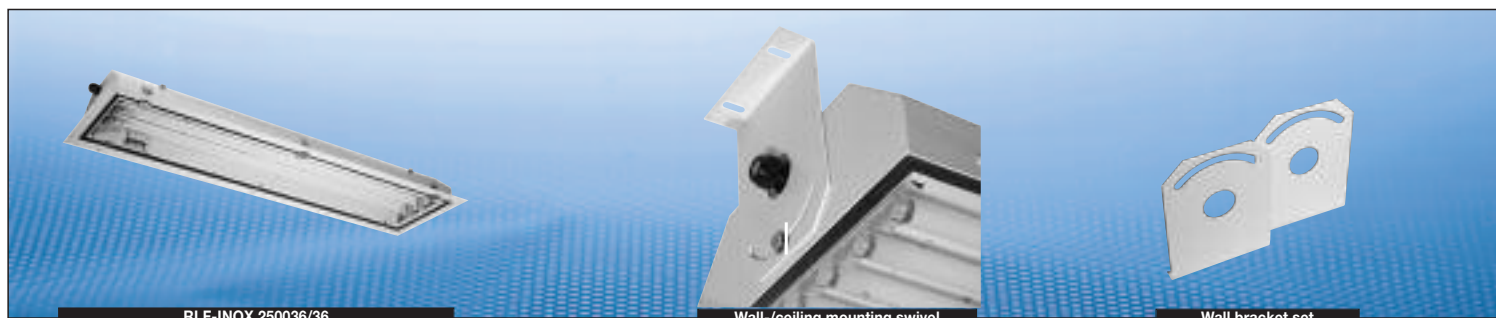

RLF-INOX 250036/36

Wall-/ceiling mounting swivel

Wall bracket set

## Ordering details RLF-INOX 250... N

Type	Cable gland <sup>1)</sup>	Thread <sup>1)</sup>	Order No.
Type RLF-INOX 250...			
RLF-INOX 25018/18 N 2/6-2 K – 1.5 h	M25 x 1.5	–	1 2283 218 203
RLF-INOX 25036/36 N 2/6-2 K – 1.5 h	M25 x 1.5	–	1 2283 236 203
RLF-INOX 25018/18 N 2/6-2 M – 1.5 h	–	M20 x 1.5	1 2283 218 204
RLF-INOX 25036/36 N 2/6-2 M – 1.5 h	–	M20 x 1.5	1 2283 236 204
RLF-INOX 250418 N 2/6-2 K – 1.5 h	M25 x 1.5	–	1 2283 418 203
RLF-INOX 250436 N 2/6-2 K – 1.5 h	M25 x 1.5	–	1 2283 436 203
RLF-INOX 250418 N 2/6-2 M – 1.5 h	–	M20 x 1.5	1 2283 418 204
RLF-INOX 250436 N 2/6-2 M – 1.5 h	–	M20 x 1.5	1 2283 436 204
RLF-INOX 25018/18 N 2/6-2 K – 3 h	M25 x 1.5	–	1 2283 218 303
RLF-INOX 25036/36 N 2/6-2 K – 3 h	M25 x 1.5	–	1 2283 236 303
RLF-INOX 25018/18 N 2/6-2 M – 3 h	–	M20 x 1.5	1 2283 218 304
RLF-INOX 25036/36 N 2/6-2 M – 3 h	–	M20 x 1.5	1 2283 236 304
RLF-INOX 250418 N 2/6-2 K – 3 h	M25 x 1.5	–	1 2283 418 303
RLF-INOX 250436 N 2/6-2 K – 3 h	M25 x 1.5	–	1 2283 436 303
RLF-INOX 250418 N 2/6-2 M – 3 h	–	M20 x 1.5	1 2283 418 304
RLF-INOX 250436 N 2/6-2 M – 3 h	–	M20 x 1.5	1 2283 436 304

<sup>1)</sup> With dustcover if entry/thread is not closed

Scope of delivery without lamps and fixing material.

**Note: mounting frames are not part of the delivery. Please see accessories.**

## Accessories

### RLF-INOX 250...

Type	Application	Order No.
Wall bracket set INOX, 2 pcs.		3 2283 000 014
Mounting frame INOX for ceiling mounting:	for luminaires 2 x 18 W	3 2283 000 008
	for luminaires 4 x 18 W	3 2283 000 009
	for luminaires 2 x/3 x 36 W	3 2283 000 010
	for luminaires 4 x 36 W	3 2283 000 011
Battery set 3.6 V/4 Ah		on request
Battery set 6 V/4 Ah		on request

### Lamp for luminaire RLF-INOX 250...

Type of lamp /socket/ Diameter	Power Light colour	Luminous flux	Order No.
Bi-pin socket G13 / T26/Ø 26 mm (T8)/ G13-60081-IEC-2220-1	18 W	1200 lm white	3 2475 900 081
		1350 lm white	3 2475 900 001
Bi-pin socket G13 / T26/Ø 26 mm (T8) G13-60081-IEC-2420-1	36 W	2850 lm white	3 2475 900 082
		3350 lm white	3 2475 900 002
Bi-pin socket G13 / T26/Ø 26 mm (T8) G13-60081-IEC-2520-1	58 W	4600 lm white	3 2475 900 083
		5200 lm white	3 2475 900 003
Aura-Ultimate	18 W	1300 lm white	3 2475 900 087
T26/Ø 26 mm (T8) Longlife	36 W	3350 lm white	3 2475 900 088
G13-socket	58 W	5200 lm white	on request