



ISO9001 Certified

**MEDC Ltd**  
Colliery Road,  
Pinxton,  
Nottingham,  
NG16 6JF  
United Kingdom


Tel: +44 (0) 1773 864100  
Fax: +44 (0) 1773 582800  
E-mail: [sales@medc.com](mailto:sales@medc.com)  
Web-site: [www.medc.com](http://www.medc.com)

**MEDC International**  
Houston USA  
**MEDC Norway**  
Stavange Norway

Phone: +1 (713) 937 9772 Fax: +1 (713) 937 9773 E-Mail: [us.sales@medcint.com](mailto:us.sales@medcint.com)

Phone: +47 51 82 98 98 Fax: +47 51 82 98 91 E-Mail: [norway.sales@medc.com](mailto:norway.sales@medc.com)

## DB16 – 25W Range, IIB version

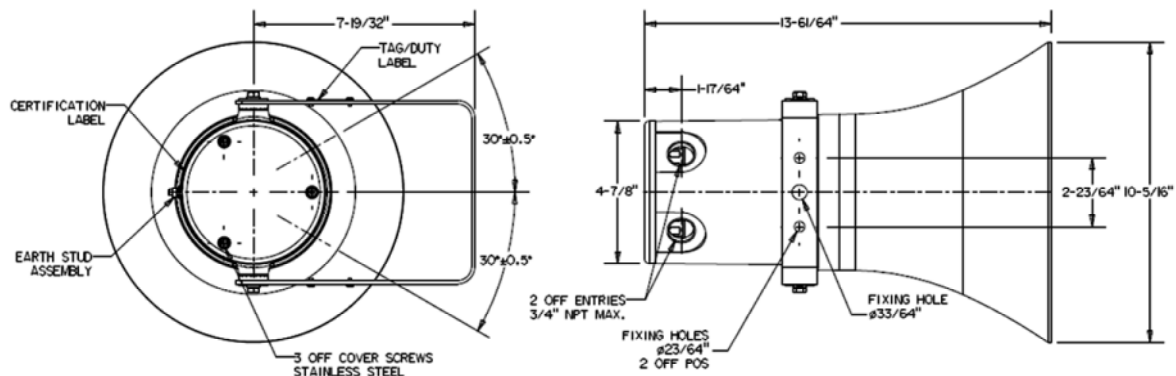

**Certification:** EExde IIB / IIC, T3 / T4 ATEX approved, Ex II 2GD (Model dependant)

IIB Version Cert. no. Baseefa04ATEX0166X  
ATEX Ex II 2G EExde IIB T3

IIC Version Cert. no. Baseefa04ATEX0167X  
ATEX Ex II 2GD EExde IIC T110°C Zones 1 & 2

Transformer Tappings	Power
	25 W
1:2	25.0
2:3	12.5
3:4	6.0
1:3	4.0
2:4	2.0
1:4	1.0

<b>Material/Colour</b>	Glass reinforced Polyester / Black	
<b>Mounting</b>	Bracket	
<b>Termination</b>	8 x 2.5mm <sup>2</sup>	
<b>Weight</b>	5.5kg (12.1lb)	
<b>IP-Rating</b>	66 & 67	
<b>Max. / Min. amb. temp</b>	<b>EExde</b>	
	-50°C + 65°C (-67°F to +147°F)	
<b>Rated / Max. power</b>	30 Watts	
<b>Gas Group</b>	<b>IIB</b>	
<b>SPL 1W/1m</b>	109dbA	
<b>SPL rated power</b>	121dbA	
<b>Effective freq. range</b>	370 – 8000Hz	
<b>Dispersion 1kHz</b>	140	
<b>Options</b>	Body colour, Transformer Voltage, Duty / Tag label, Entries.	

