



MOUNTING ARRANGEMENT

1. Fit slide mount piece to bracket.
2. Secure bracket to wall.
3. Attach slide mount to loudspeaker.



4. Slide loudspeaker with fitted mount onto bracket.



5. Adjust speaker to required position and tighten knurled knob.

NOTE: Slide bracket is supplied with unit but is optional depending on required security.

The SUB range of monitor-style loudspeakers provides the installer with a stylish solution to sound reinforcement in a variety of locations. These compact units are both pleasing to the eye and unobtrusive.



The cabinets are manufactured from a structurally-loaded plastic material with excellent acoustic properties. the SUB-200 is fitted with a high quality full-range driver; the SUB-500 is a two-way reflex design with an extended bass response. Both systems are ideal for music reproduction.

These products are available in both 8-ohm and 100 volt line versions and come complete with a swivel mounting and slide bracket. Weatherproof and BS5839 part 8 compliant versions are available.

BS5839 part 8 compliant versions can be fitted with fire-rated cable tails on request – contact sales office.

- ★ Up to 105 dB(A) at 50 Watts.
- ★ Up to 50 Watts.
- ★ ABS plastic.
- ★ 8 ohm and 100V line versions available.
- ★ Available in weatherproof and BS5839 part 8 compliant options.




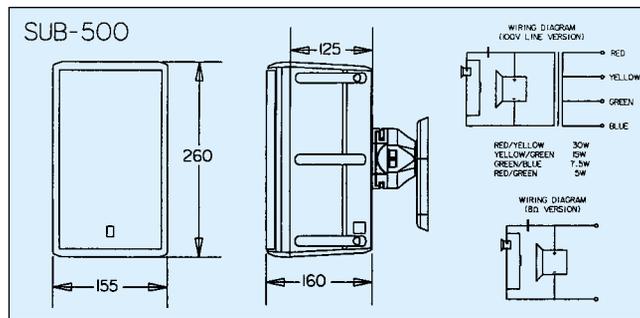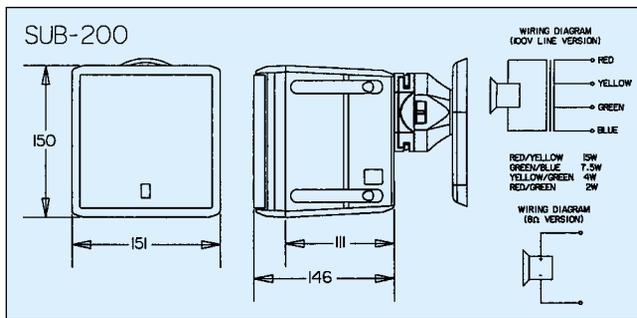




SUB-200

SUB-500

Frequency Response at 1W, 1M

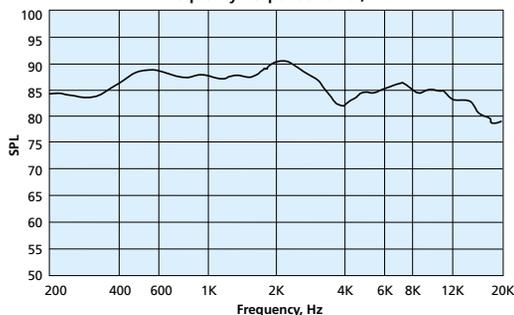

Frequency Response at 1W, 1M

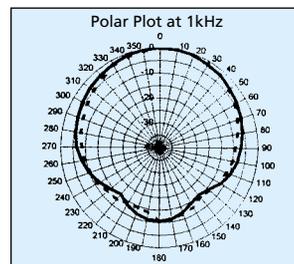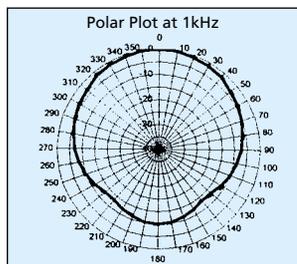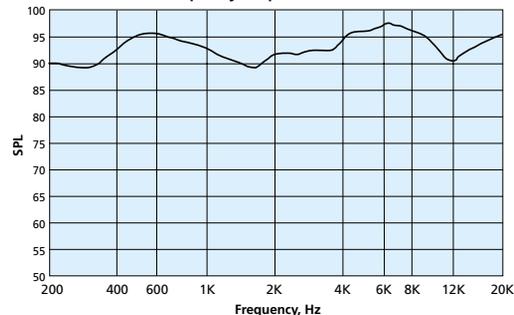

Specifications

	SUB-200	SUB-500
Rated Power, Watts (100V line):	15	30
Maximum power, RMS, Watts (8Ω):	20	50
Material:	Polypropylene	Polypropylene
Colour/finish:	Black or White	Black or White
Sound pressure level, power Watts/1m, dB: at 1 Watt at 1 metre:	101 89	105 90
Nett weight, Kg:	1.2 (1.4 with transformer)	1.8 (2.3 with transformer)
Max/min ambient temperature:	-10°C to +55°C	-10°C to +55°C
Effective frequency range, Hz:	100-16,000	80-20,000
Dispersion at 1,000hz, degrees° conical:	160	180
Terminal (T & 8 ohm):	Spring Loaded	Spring Loaded
Terminal (T PT8):	20mm Cable Gland	20mm Cable Gland
Mounting:	Keyhole/Swivel & Slide Bracket	Keyhole/Swivel & Slide Bracket
Transformer power tapings, Watts:	2.0, 4.0, 7.5, 15.0	5.0, 7.5, 15.0, 30.0
Input impedance standard model, Ω:	5k, 2.5k, 1.33k, 666	2k, 1.33k, 666, 333
Impedance, Ω:	8	8

Ordering Requirements

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Description	Option	Colour																		
<input type="text"/> SUB-200 SUB-500	<input type="text"/> <table border="1"> <thead> <tr> <th>Description</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Transformer 8 Ohm only</td> <td>T</td> </tr> <tr> <td>Transformer & BS5839 PT8 compliant</td> <td>T PT8</td> </tr> </tbody> </table>	Description	Code	Transformer 8 Ohm only	T	Transformer & BS5839 PT8 compliant	T PT8	<input type="text"/> <table border="1"> <thead> <tr> <th>Option</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>S</td> </tr> <tr> <td>Weatherproof</td> <td>WP</td> </tr> </tbody> </table>	Option	Code	Standard	S	Weatherproof	WP	<input type="text"/> <table border="1"> <thead> <tr> <th>Colour</th> <th>Code</th> </tr> </thead> <tbody> <tr> <td>White</td> <td>W</td> </tr> <tr> <td>Black</td> <td>B</td> </tr> </tbody> </table>	Colour	Code	White	W	Black	B
Description	Code																				
Transformer 8 Ohm only	T																				
Transformer & BS5839 PT8 compliant	T PT8																				
Option	Code																				
Standard	S																				
Weatherproof	WP																				
Colour	Code																				
White	W																				
Black	B																				



Loudspeakers

MEDC Ltd

Colliery Road, Pinxton, Nottingham, NG16 6JF, U.K.
 Tel: +44 (0)1773 864100
 Fax: +44 (0)1773 582800
 Sales Enq. Fax: +44 (0)1773 582830
 Sales Orders Fax: +44 (0)1773 582832
 E-mail: sales@medc.com
 Website: www.medc.com

All the above specifications, dimensions, weights and tolerances are nominal (typical) and MEDC reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.
 DS209/B