

# 5 JOULE XENON BEACONS

## EExd, Weatherproof

### XB9 Range



- ★ All GRP
- ↓
- ★ Low Initial Cost
- ↓
- ★ Greater Reliability
- ↓
- ★ Minimal Maintenance Cost
- ↓
- ★ Reduced Cost of Ownership

## Introduction

These compact and lightweight beacons have been designed for use in potentially explosive atmospheres and harsh environmental conditions. The beacon housing, including the flamepaths, is manufactured completely from a UV stable glass reinforced polyester which is ideally suited for use offshore and onshore.

Stainless Steel screws and mounting bracket are incorporated ensuring a totally corrosion free unit.

Units can be painted to customer specification and supplied with identification labels.

- ★ Zone 1 and Zone 2 use.
- ★ EExd IIC T6.
- ★ ATEX Approved, Ex II 2G.
- ★ BASEEFA Certified.
- ★ GOST 'R' Certified.
- ★ Brazilian (Inmetro) Certified.
- ★ IP66 and IP67.
- ★ Certified Temperature -55°C to +55°C.
- ★ Corrosion Free GRP.
- ★ Various lens colours.
- ★ Lens guard fitted as standard.
- ★ Optional gland plus cable tail.
- ★ Stainless steel mounting bracket & screws.

MEDC Ltd, Colliery Road,  
Pinxton, Nottingham NG16 6JF, UK.  
Tel: +44 (0)1773 864100  
Fax: +44 (0)1773 582800

MEDC International, 5829 West Sam Houston Parkway,  
North, Suite 1005, Houston, Texas 77041, USA.  
Tel: +1 (713) 937 9772  
Fax: +1 (713) 937 9773

MEDC Norway, Auglaendsmyraa 6,  
4016, Stavanger, Norge.  
Tel: +47 913 92 289  
Fax: +47 914 46 030

Sales Enq. Fax: +44 (0)1773 582830 Sales Orders Fax: +44 (0)1773 582832  
E-Mail: [sales@medc.com](mailto:sales@medc.com) Web: [www.medc.com](http://www.medc.com)



6DS098/K

## Specification

Certification:	CENELEC EN50014 and EN50018. BASEEFA EExd II CT6 (T5). Cert. No. BAS00ATEX2031 Zone 1 and Zone 2. GOST 'R' Certification: 1 Exd IIC T5/T6 Brazilian (Inmetro) Certified: BR-Ex d IIC T5/T6
Materials:	Body & Cover - Glass Reinforced Polyester (GRP). Lens - Toughened Glass. Cover Screws & Bracket - Stainless Steel 316
Finish:	Natural or painted to customer requirements.


Voltage	DC			AC 50/60 Hz	
	12	24	48	110	240/254
Tube Energy (J)	5	5	5	5	5
Peak Current Consumption (A)	0.74	0.32	0.18	0.1	0.06
Effective Intensity (Cd)	29	29	29	29	29
Peak Intensity (Cd)	22213	22213	22213	22213	22213
Power Consumption (W)	9	8	9	11	15

NOTE: The above figures (Cd) are for a clear lens @ 1 Hz flash rate.  
A report is available if required.

### For Coloured Lenses:

Colour	Red	Blue	Amber	Green	Yellow
Multiplying Factors (Approximate)	0.15	0.12	0.51	0.49	0.86

Weight:	1.6kg.
Certified Temperature:	-55°C to +40°C(T6). -55°C to +55°C (T5).
Ingress Protection:	IP66 & IP67.
Fire Retardancy:	GRP is fire retardant to ISO 1210.
Terminals:	3 x 2.5mm <sup>2</sup> .
Mounting:	Wall mounted via bracket.
Entries:	1 x M20 or PG 13.5. Optional: 1 x 3m cable tail and gland.

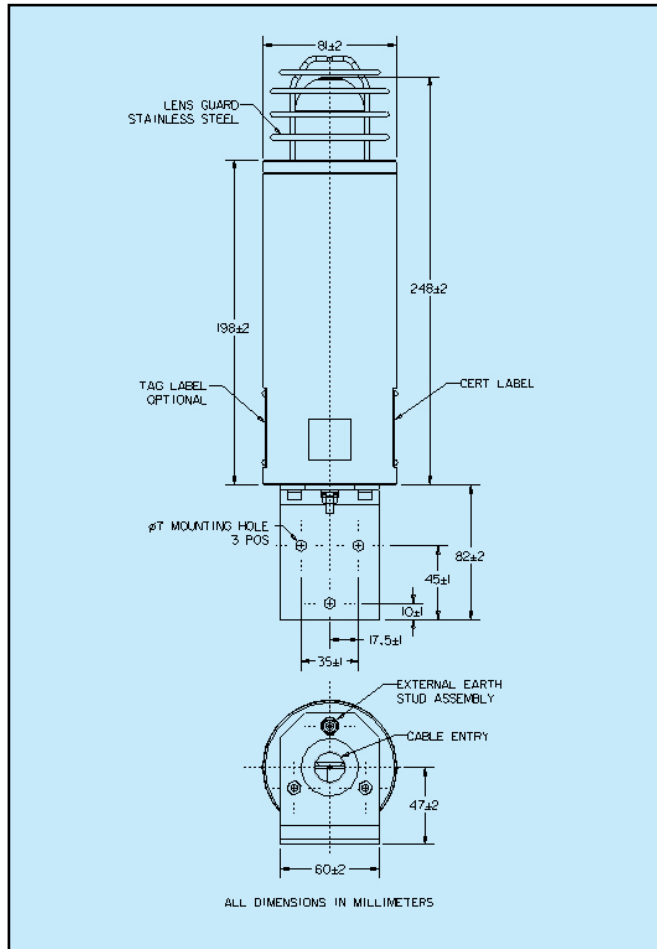

## Ordering Requirements

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box. **Standard products available ex-stock as follows:**

Product	Description
<b>XB9D02406RYNCBN</b>	ATEX approved Ex II 2G, certified EExd IIC T6, 24v d.c., 60 flashes/min, red lens, lens guard, M20 entry + gland + 3m cable, natural black finish.
<b>XB9D02406AYNCBN</b>	ATEX approved Ex II 2G, certified EExd IIC T6, 24v d.c., 60 flashes/min, amber lens, lens guard, M20 entry + gland + 3m cable, natural black finish.
<b>XB9D24006RYNCBN</b>	ATEX approved Ex II 2G, certified EExd IIC T6, 240v a.c., 60 flashes/min, red lens, lens guard, M20 entry + gland + 3m cable, natural black finish.

Model	Certification	Voltage	Flash Rate	Lens Colour	Lens Guard	Tag Label	Entries/Cable Tail	Body Colour																																																																		
XB9					Y																																																																					
<table><tr><th>Voltage</th><th>Code</th></tr><tr><td>12V d.c.</td><td>012</td></tr><tr><td>24V d.c.</td><td>024</td></tr><tr><td>48V d.c.</td><td>048</td></tr><tr><td>110V a.c.</td><td>110</td></tr><tr><td>240V a.c.</td><td>240</td></tr><tr><td>254V a.c.</td><td>254</td></tr></table>		Voltage	Code	12V d.c.	012	24V d.c.	024	48V d.c.	048	110V a.c.	110	240V a.c.	240	254V a.c.	254	<table><tr><th>Flash Rate</th><th>Code</th></tr><tr><td>60/min.</td><td>06</td></tr><tr><td>Other flash rates available on request, please specify.</td><td></td></tr></table>	Flash Rate	Code	60/min.	06	Other flash rates available on request, please specify.		<table><tr><th>Colour</th><th>Code</th></tr><tr><td>Red</td><td>R</td></tr><tr><td>Blue</td><td>B</td></tr><tr><td>Green</td><td>G</td></tr><tr><td>Yellow</td><td>Y</td></tr><tr><td>Amber</td><td>A</td></tr><tr><td>Clear</td><td>C</td></tr></table>	Colour	Code	Red	R	Blue	B	Green	G	Yellow	Y	Amber	A	Clear	C	<table><tr><th>Tag/Duty Label</th><th>Code</th></tr><tr><td>None</td><td>N</td></tr><tr><td>*Yes</td><td>Y</td></tr><tr><td>*(Please specify)</td><td></td></tr></table>	Tag/Duty Label	Code	None	N	*Yes	Y	*(Please specify)		<table><tr><th>Entries</th><th>Code</th></tr><tr><td>1 x 20mm</td><td>1B</td></tr><tr><td>1 x PG 13.5</td><td>1P</td></tr><tr><td><u>Cable &amp; Tail</u></td><td></td></tr><tr><td>3m cable</td><td>CB</td></tr></table>	Entries	Code	1 x 20mm	1B	1 x PG 13.5	1P	<u>Cable &amp; Tail</u>		3m cable	CB	<table><tr><th>Finish</th><th>Code</th></tr><tr><td>Natural Black</td><td>N</td></tr><tr><td>Red</td><td>R</td></tr><tr><td>Blue</td><td>B</td></tr><tr><td>Yellow</td><td>Y</td></tr><tr><td>Grey</td><td>G</td></tr><tr><td>White</td><td>W</td></tr><tr><td>Special Finish</td><td>S</td></tr></table>	Finish	Code	Natural Black	N	Red	R	Blue	B	Yellow	Y	Grey	G	White	W	Special Finish	S
Voltage	Code																																																																									
12V d.c.	012																																																																									
24V d.c.	024																																																																									
48V d.c.	048																																																																									
110V a.c.	110																																																																									
240V a.c.	240																																																																									
254V a.c.	254																																																																									
Flash Rate	Code																																																																									
60/min.	06																																																																									
Other flash rates available on request, please specify.																																																																										
Colour	Code																																																																									
Red	R																																																																									
Blue	B																																																																									
Green	G																																																																									
Yellow	Y																																																																									
Amber	A																																																																									
Clear	C																																																																									
Tag/Duty Label	Code																																																																									
None	N																																																																									
*Yes	Y																																																																									
*(Please specify)																																																																										
Entries	Code																																																																									
1 x 20mm	1B																																																																									
1 x PG 13.5	1P																																																																									
<u>Cable &amp; Tail</u>																																																																										
3m cable	CB																																																																									
Finish	Code																																																																									
Natural Black	N																																																																									
Red	R																																																																									
Blue	B																																																																									
Yellow	Y																																																																									
Grey	G																																																																									
White	W																																																																									
Special Finish	S																																																																									
<table><tr><th>Certification</th><th>Code</th></tr><tr><td>Uncertified</td><td>W</td></tr><tr><td>EExd</td><td>D</td></tr><tr><td>GOST 'R'</td><td>G</td></tr><tr><td>Inmetro</td><td>DM</td></tr></table>		Certification	Code	Uncertified	W	EExd	D	GOST 'R'	G	Inmetro	DM			<table><tr><th>Lens Guard</th><th>Code</th></tr><tr><td>Yes</td><td>Y</td></tr></table>	Lens Guard	Code	Yes	Y																																																								
Certification	Code																																																																									
Uncertified	W																																																																									
EExd	D																																																																									
GOST 'R'	G																																																																									
Inmetro	DM																																																																									
Lens Guard	Code																																																																									
Yes	Y																																																																									