


DO NOT SCALE



- 1/ TYPE DB1/H
- 2/ CERTIFICATION No. BASEEFA Ex95Y1045 Exd IIBT3 (T.AMB 55°C)
- 3/ WEIGHT 5.6±0.3 kg (ALUMINIUM) & 12.7±0.3 kg (S.STEEL).
- 4/ MATERIAL :- BODY & LID - ALUMINIUM GRADE LM25TF TO BS 1490:1988 OR STAINLESS STEEL GRADE 316/ANC 4B TO BS 3146:1975. RE-ENTRANT HORN - POLYCARBONATE.
- 5/ IDENTITY/TAG LABELS LETTER SIZE 5mm MAX
- 6/ TERMINALS SUITABLE FOR UP TO 2.5mm SQ CABLE
- 7/ CABLE ENTRIES AVAILABLE AT "1" "2" "3"
- 8/ HYLOMAR PL32 SEALANT APPLIED TO ALL CERTIFIED BLANKING PLUGS

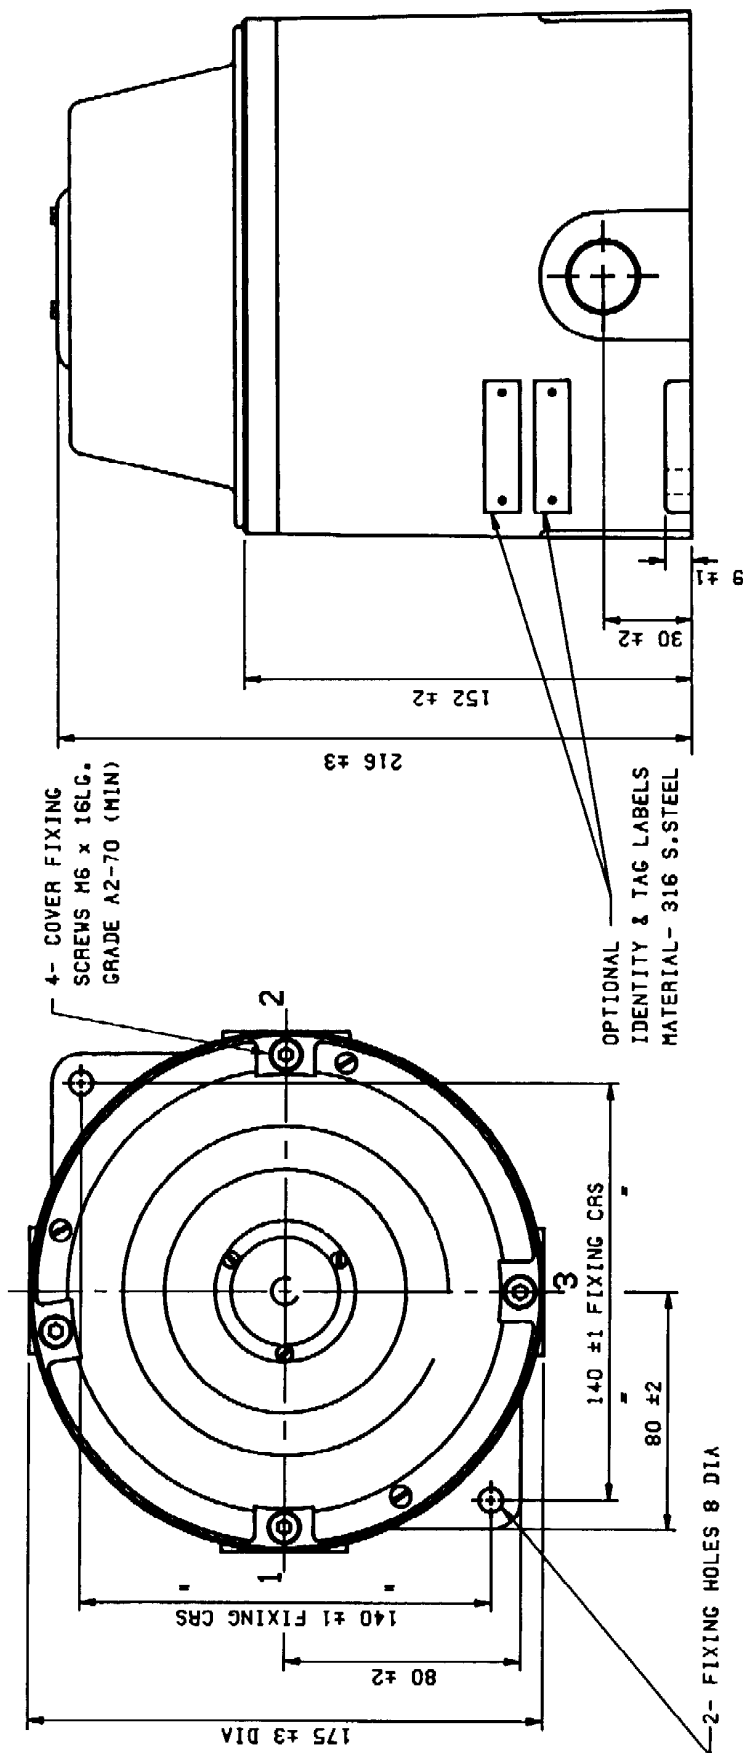

MEDC Colliery Road, Pinxton,
Nottingham NG16 6JF. U.K.
Tel. Ripley (01773) 812249
Fax: (01773) 580282



ISSUES		TITLE		DB1/H		GENERAL ARRANGEMENT		SIZE		DRG NO		ISSUE	
WELDING TERMS & SYMBOLS TO BS 499 PART 2		MACHINE SYMBOLS THUS ∇ μ m		THIS DRAWING IS CONFIDENTIAL AND IS THE PROPERTY OF MEDC AND MUST NOT BE REPRODUCED EITHER WHOLLY OR PARTLY ALL RIGHTS IN RESPECT OF PATENTS, DESIGNS AND COPYRIGHT ARE RESERVED		DRN.		CH'D		AP'D		SCALE	
CARBON STEEL TO BE WELDED IN ACCORDANCE WITH BS 5135		REMOVE ALL BURRS AND SHARP EDGES				511499		7/4		7/4		-	
STAINLESS STEEL TO BE WELDED IN ACCORDANCE WITH BS 3019 PT 2 - 1960		TOLERANCES											
WELDS TO BE FREE FROM SLAG & SPLATTER		GEN. MC OR CRS											
		±0.05 ±0.03											