


SPEAKERS – Up to 25 Watts Hazardous Location, Weatherproof DB4 Range



15W/25W (Long Flare)

**Now UL listed to +158°F (+70°C)
Ambient Temperature**

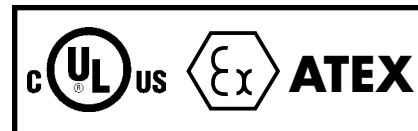

8W (Short Flare)

Introduction

This range of loudspeakers, intended for use in potentially explosive atmospheres, has a power rating of up to 25 watts and is suitable for use in all gas groups including hydrogen.

The flamepaths, flare and the body are manufactured completely from a UV stable glass reinforced polyester. Stainless steel screws and sinter are incorporated thus ensuring a corrosion free product. A tapered flamepath is used to overcome the problems of assembly of parallel spigot flamepaths.

European, Russian and other worldwide approvals are available, refer to main section of catalog.

- ★ UL listed for USA and Canada
 - Class I, Div 2, Groups A, B, C & D.
 - Class I, Zone 1, AExd IIC T4.
- ★ CSFM approved.
- ★ ATEX approved.
- ★ NEMA 4x and 6, IP66 & 67.
- ★ Certified temperature –67°F to +158°F.
–55°C to +70°C.
- ★ GRP corrosion-free flamepaths.
- ★ 109dBA at 25 watts at 10 feet.
- ★ 8, 15 and 25 watt versions.
- ★ Power tapping, via integral transformer.
- ★ Ratcheted swivel bracket.
- ★ Stainless steel sinter.
- ★ Stainless steel mounting bracket.
- ★ Tapered flamepath.




MEDC Ltd, Colliery Road,
Pinxton, Nottingham NG16 6JF, UK.
Tel: +44 (0)1773 864100
Fax: +44 (0)1773 582800

MEDC International, 5829 West Sam Houston Parkway,
North, Suite 1005, Houston, Texas 77041, USA.
Tel: +1 (713) 937 9772
Fax: +1 (713) 937 9773

MEDC Norway, Auglaendsmyråa 6,
4016, Stavanger, Norge.
Tel: +47 913 92 289
Fax: +47 914 46 030


Sales Enq. Fax: +44 (0)1773 582830 Sales Orders Fax: +44 (0)1773 582832
E-Mail: sales@medc.com Web: www.medc.com

MEDC

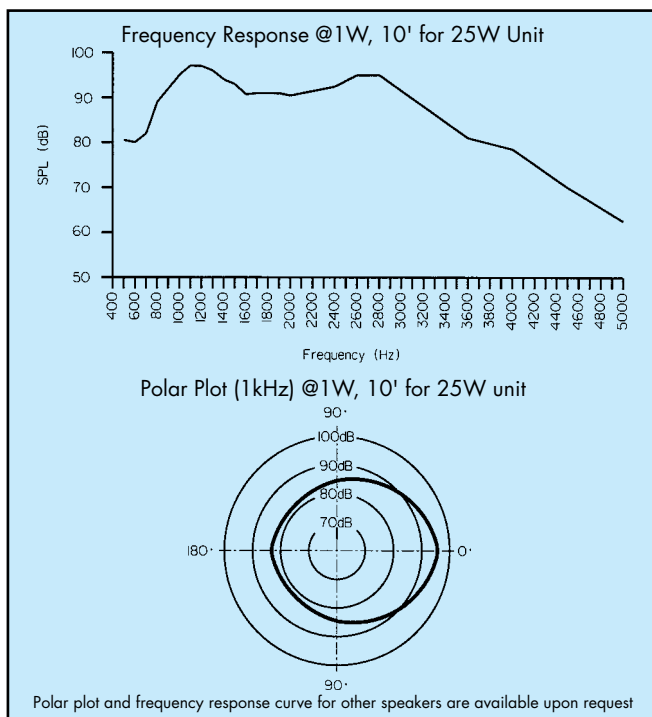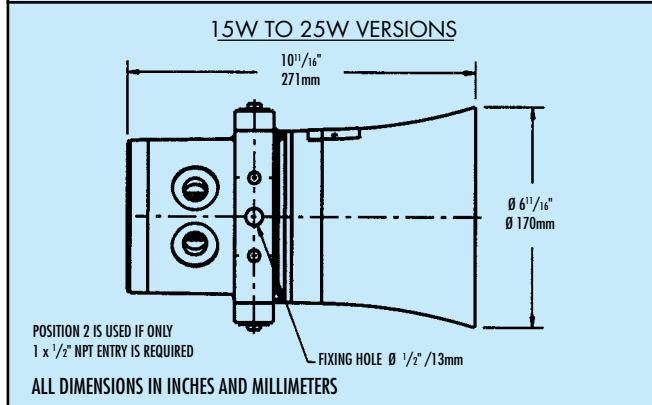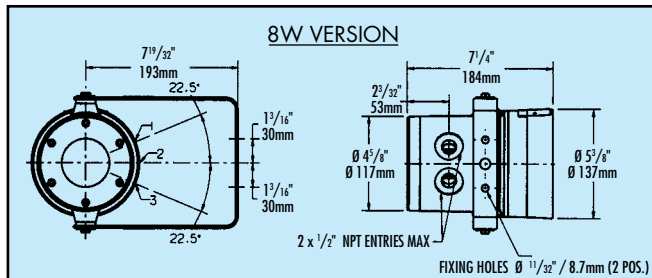

Specification

Rated Power:	8, 15 or 25 watts RMS continuous (at 77°F).
Certification:	UL Listed for USA and Canada – Class I, Div 2, Groups A-D. – Class I, Zone 1, AExd IIC T4. UL Listing No. E203310. ATEX approved: EN50014, 18, 19. Cert. No. BAS00ATEX2097X, EExd IIC T4/T5. Cert. No. BAS00ATEX2098X, EExdc IIC T4/T5. Zones 1 and 2. Not for use in atmospheres containing carbon disulphide.
Material:	Body & horn in anti-static, UV stable, glass reinforced polyester. Swivel bracket in stainless steel. Captive cover screws in stainless steel.
Finish:	Body and horn, natural black or epoxy paint coated to client's color requirements.
Output:	97 dBA at 1 watt at 10 feet. 109 dBA at 25 watts at 10 feet. Measured in accordance with IEC 268.
Weight:	11lb/5.0kg approx. dependent on model.
Certified Temperature:	–67°F to +158°F. –55°C to +70°C.
Ingress Protection:	NEMA 4x and 6, IP66 & 67.
Frequency Range:	400Hz to 8kHz.
Voice Coil Impedance:	8 ohms.
Transformer:	Used to vary the rated power by selecting different tapings (see table below).



Transformer Tappings	Power		
	25W	15W	8W
1:2	25.0	15.0	8.0
2:3	12.5	7.5	4.0
3:4	6.0	5.0	2.0
1:3	4.0	4.0	1.5
2:4	2.0	2.0	0.7
1:4	1.0	0.8	0.4

- Transformer Options:
- Loop in/Loop out: (4 x 2) terminal tap change (8 terminals).
 - Optional Tapping: 4 terminal tap change with 2 terminals (5 & 6) directly connected to driver (8 ohms).

Other tapings & driver impedances available on request.

Terminals:	8 x 14AWG Other terminal arrangements available on request.
Mounting:	Bracket with ratchet facility.
Labels:	Duty and tag labels optional.
Cable Entries:	Up to 2 x 1/2" NPT.

Ordering Requirements

DB4	Max. Rated Power	Certification	Transformer	Labels	Entries	Finish																																				
		UL																																								
	<table><tr><td>Power</td><td>Code</td></tr><tr><td>8 watt</td><td>8</td></tr><tr><td>15 watt</td><td>15</td></tr><tr><td>25 watt</td><td>25</td></tr></table>	Power	Code	8 watt	8	15 watt	15	25 watt	25		<table><tr><td>Transformer</td><td>Code</td></tr><tr><td>Yes</td><td>X*</td></tr><tr><td>None</td><td>N</td></tr></table> <p>*Std 100V Other values available, specify voltage.</p>	Transformer	Code	Yes	X*	None	N	<table><tr><td>Label</td><td>Code</td></tr><tr><td>Duty</td><td>D*</td></tr><tr><td>Tag</td><td>T*</td></tr><tr><td>None</td><td>N</td></tr></table> <p>*Please specify wording</p>	Label	Code	Duty	D*	Tag	T*	None	N	<table><tr><td>Entries</td><td>Code</td></tr><tr><td>1 x 1/2"NPT</td><td>1C</td></tr><tr><td>2 x 1/2"NPT</td><td>2C</td></tr></table> <p>To specify certified plug, suffix appropriate code with 'P'. e.g. 2CP is 2 x 1/2" NPT entries with one certified plug.</p>	Entries	Code	1 x 1/2"NPT	1C	2 x 1/2"NPT	2C	<table><tr><td>Finish</td><td>Code</td></tr><tr><td>Natural Black</td><td>N</td></tr><tr><td>Red</td><td>R</td></tr><tr><td>Special</td><td>S*</td></tr></table> <p>*Please specify</p>	Finish	Code	Natural Black	N	Red	R	Special	S*
Power	Code																																									
8 watt	8																																									
15 watt	15																																									
25 watt	25																																									
Transformer	Code																																									
Yes	X*																																									
None	N																																									
Label	Code																																									
Duty	D*																																									
Tag	T*																																									
None	N																																									
Entries	Code																																									
1 x 1/2"NPT	1C																																									
2 x 1/2"NPT	2C																																									
Finish	Code																																									
Natural Black	N																																									
Red	R																																									
Special	S*																																									

To order ATEX approved version, refer to European data sheet.



All the above specifications, dimensions, weights and tolerances are nominal (typical) and MEDC reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.