


NOTES:

1. TYPE: SM87 PB UL
2. APPROVAL: - UL LIST No. E186629
- CLASS 1, DIV 1, GROUPS C8D.
- TEMP: -67°F TO 131°F (STANDARD)
-4°F TO 131°F (LED VERSION)
3. WEIGHT, 5.5 lb. APPROX.
4. MATERIAL: LM25TF - MARINE GRADE ALLOY
5. FUNCTION LABEL LETTER SIZE 3/16" MAX.
6. TERMINALS SUITABLE FOR UP TO 14 AWG.
7. CABLE ENTRIES AVAILABLE "T", "B", "L", "R", "1/2" OR 3/4" NPT
8. UNIT IS SELF LATCHING - RESET KEY PROVIDED.
9. GENERAL DIMENSIONAL TOLERANCE = ±1/16 U.O.S.
10. UL LISTED SEALANT TO BE APPLIED TO ALL GLANDS & BLANKING PLUGS.

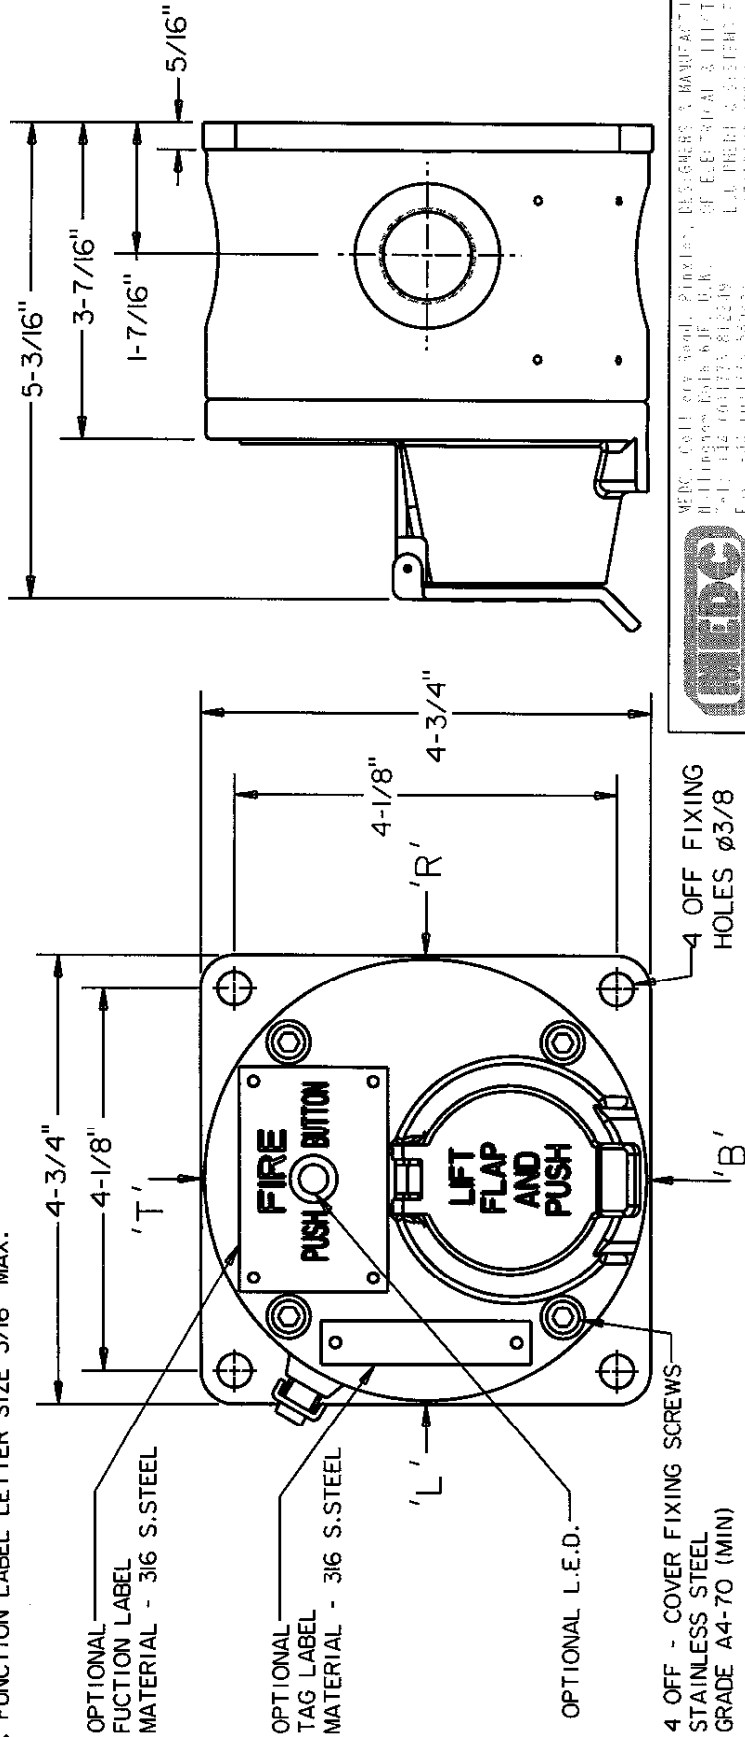

MEDC, Cellery Road, Plympton, Devon PL7 3JF, U.K.
Tel: 01752 812249 Fax: 01752 812249
E-mail: info@medc.co.uk
MEDC is a registered company in the U.K.
LTD. No. 02017355

ISSUES		TITLE	
	DATE:	GH	9/8/00
	CHECKED BY:	M. SELDEN	11/8/00
	APPROVED BY:	G. HODGKINSON	11/8/00
	SCALE:	1:2	A4
DRAWN BY:		SM87 PB UL CUSTOMER G.A.	
DRG No.		238-118	
ISSUE		A	