


These elegant but rugged sound projectors are manufactured in an aluminium extruded case finished in white (RAL 9010). The RAC-15 has a slide fitting mounting bracket whereas the PAC 15 has a fitted U-bracket. Incorporated in these units is a high quality dual cone driver unit giving both clear speech and excellent background music reproduction for many applications both indoors and out. With a rugged construction, these units are ideally suited for use in corridors, passageways, shopping centres, prisons, car parks, railway stations and other public places.

The RAC-15 and PAC-15 are BS 5839, part 8 compliant, weatherproof to IP54 and are fitted with a 100V line transformer and a 0.5m fire rated cable tail as standard.

Additional modifications available: 8 ohm, addressable modules, special cable tails/glands (including armoured and braided) and special paint finishes.


- ★ Up to 104dB(A) at 15 Watts at 1 metre.
- ★ 15 Watts.
- ★ BS 5839, part 8 compliant as standard.
- ★ IP54.
- ★ Aluminium.
- ★ 100V line transformer as standard.
- ★ Options available: 8 ohms, addressable modules, special paint finish, special cable gland and tails (including armoured and braided).

RAC-15

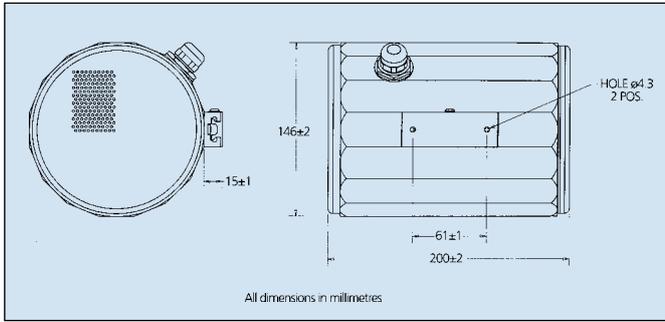


All dimensions in millimetres

PAC-15





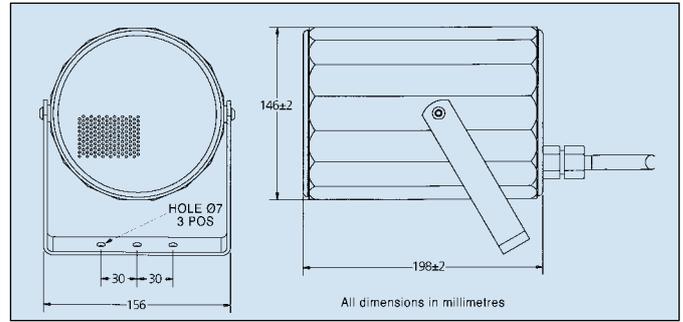


All dimensions in millimetres

Frequency Response at 1W, 1M

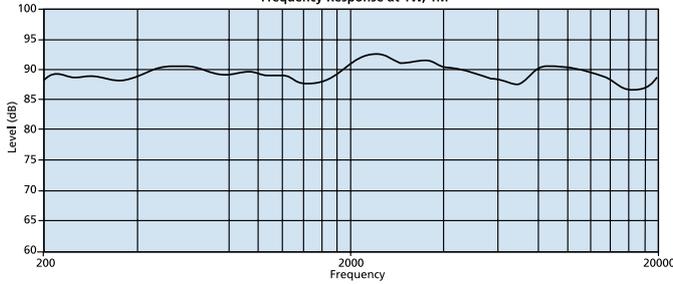

Frequency Response at 1W, 1M

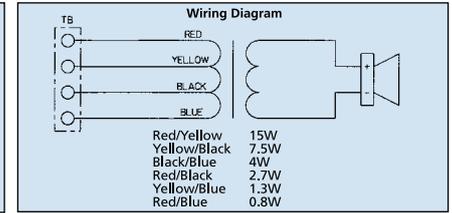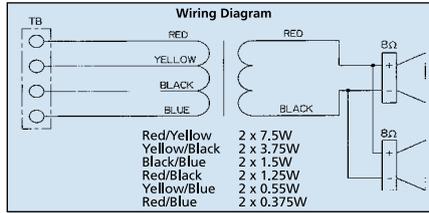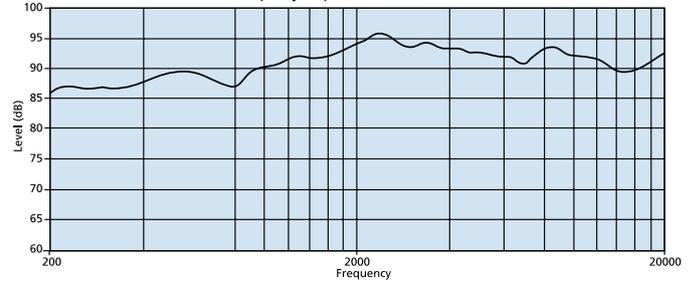

	RAC-15	PAC-15
<i>Rated power, Watts</i>	2 x 7.5	15
<i>Maximum power, RMS, Watts</i>	15	20
<i>Material</i>	Aluminium	Aluminium
<i>Colour / finish</i>	White to RAL 9010	White to RAL 9010
<i>Sound pressure level, power watts / 1m, dB</i>	98	104
<i>Sound pressure level, 1 watt / 1m, dB</i>	90	92
<i>IP Norm</i>	54	54
<i>Nett weight, Kg</i>	2.6	2.4
<i>Max / min ambient temperature degrees°C</i>	90 / -40	90 / -40
<i>Effective frequency range, Hz</i>	140-20,000	120-20,000
<i>Dispersion at 1000 Hz, degrees° conical</i>	130	130
<i>Terminal</i>	0.5m fire rated cable	0.5m fire rated cable
<i>Mounting</i>	Slide Bracket	'U' Bracket
<i>Transformer power tapings, Watts</i>	0.75, 1.1, 2.5, 3.0, 7.5, 15	0.8, 1.3, 2.7, 4.0, 7.5, 15
<i>Imput impedance standard model, Ohms</i>	13.3k, 9.1k, 4.0k, 3.3k, 1.3k, 666Ω	12.5k, 7.7k, 3.7k 2.5k 1.3k, 666Ω
<i>Impedance, Ohms</i>	4	8

Ordering Requirements

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Transformer	Code
<input type="text"/>	<input type="text"/>	
RAC-15	Transformer	Code
PAC-15	100V line transformer & BS5839, part 8 compliant	FT
	8 ohm	8 OHM

For special finishes and other modifications, contact sales office.



LowSpeakers

MEDC Ltd

Colliery Road, Pinxton, Nottingham, NG16 6JF, U.K.
 Tel: +44 (0)1773 864100
 Fax: +44 (0)1773 582800
 Sales Enq. Fax: +44 (0)1773 582830
 Sales orders Fax: +44 (0)1773 582832
 E-mail: sales@medc.com
 Website: www.medc.com

All the above specifications, dimensions, weights and tolerances are nominal (typical) and Next Two reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.