
### **Emergency Luminaire Aluminium-Enclosure** 70011 LED CG-S 70021 LED CG-S



### **Technical data**

### 70011 LED CG-S / 70021 LED CG-S



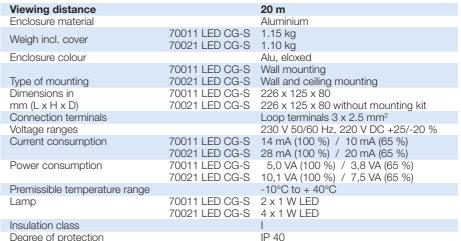

70011 LED CG-S

70021 LED CG-S DM with mounting kit

## **Ordering details**

Degree of protection

Туре	Scope of supply	Order No.
70011 LED CG-S	Luminaire with CEWA GUARD monitoring and 20-digit address switch, without cover	400 71 351 270
70021* LED CG-S WM	Luminaire with CEWA GUARD monitoring for wall mounting, with 20-digit address switch, without cover	400 71 351 271
70021* LED CG-S DM	Luminaire with CEWA GUARD monitoring for ceiling mounting, with 20-digit address switch, without cover	400 71 351 272
70021* LED CG-S PM	Luminaire with CEWA GUARD monitoring for pendulum mounting, with 20-digit address switch, without cover	400 71 351 273
Cover PL	Cover with silk screened legend acc. DIN 4844 <	400 71 351 500
Cover PR	Cover with silk screened legend acc. DIN 4844	400 71 351 501
Cover PU	Cover with silk screened legend acc. DIN 4844	400 71 351 502
Cover PL	Cover with silk screened legend	400 71 351 508
Cover PR	Cover with silk screened legend	400 71 351 509
Cover PU	Cover with silk screened legend	400 71 351 510
Dummy cover		400 71 351 196

<sup>\*</sup> Each luminaire requires 2 covers. Installation material is not included in the scope of delivery of the luminaire. Please order installation material separately depending on the type of mounting (see accessories).

DM = ceiling mounting, WM = wall mounting, PM = pendulum mounting



### Accessories


Туре	Scope of supply	Order No.
Mounting kit for wall and ceiling mounting Mounting kit for wall and	for WM / DM rectangular 42 mm	400 71 351 011
ceiling mounting Mounting kit for wall and	for WM / DM rectangular 100 mm	400 71 351 497
ceiling mounting Single pendulum 0.5 m	for WM / DM rectangular 500 mm for PM	400 71 351 498 400 71 351 157




### 5

## Emergency Luminaire Aluminium-Enclosure 70011 LED CG-S 70021 LED CG-S


#### Dimensions (mm)





70021 LED CG-S PM

70021 LED CG-S DM



70021 LED CG-S WM

A = 42 mm, 100 mm and 500 mm



## **Emergency Luminaire Aluminium-Enclosure** 71011 LED CG-S 71021 LED CG-S



### **Technical Data**

### 71011 LED CG-S / 71021 LED CG-S



71011	LED CG-S



71021 LED CG-S WM with mounting kit

7 1011 ELD 00 07 7 1021 ELD 0	<b>u</b> 0	
Viewing distance		32 m
Enclosure material		Aluminium
Weight incl. cover	71011 LED CG-S 71021 LED CG-S	1.65 kg 1.30 kg
Enclosure colour		Aluminium, anodized
Type of mounting	71011 LED CG-S 71021 LED CG-S	Wall and ceiling mounting
Dimensions in mm (L x H x D)	71011 LED CG-S 71021 LED CG-S	349 x 188 x 80 without mounting kit
Connection terminals		Loop terminals 3 x 2.5 mm <sup>2</sup>
Voltage ranges		230 V 50/60 Hz, 220 V DC +25/-20 %
Current consumption	71011 LED CG-S 71021 LED CG-S	28 mA (100 %) / 20 mA (65 %) 56 mA (100 %) / 40 mA (65 %)
Power consuption	71011 LED CG-S 71021 LED CG-S	10,1 VA (100 %) / 7,5 VA (65 %) 20,2 VA (100 %) / 15 VA (65 %)
Premissible temperature range		-10°C to + 40°C
Lamp	71011 LED CG-S 71021 LED CG-S	
Insulation class		
Degree of protection		IP 40

# Ordering details

Туре	Scope of supply	Order No.
71011 LED CG-S	Luminaire with CEWA GUARD monitoring and 20-digit address switch, without cover	400 71 351 280
71021* LED CG-S WM	Luminaire with CEWA GUARD monitoring for wall mounting, with 20-digit address switch, without cover	400 71 351 281
71021* LED CG-S DM	Luminaire with CEWA GUARD monitoring for ceiling mounting, with 20-digit address switch, without cover	400 71 351 282
71021* LED CG-S PM	Luminaire with CEWA GUARD monitoring for pendulum mounting, with 20-digit address switch, without cover	400 71 351 283
Cover PL	cover with silk screened legend acc. DIN 4844 <	400 71 351 600
Cover PR	cover with silk screened legend acc. DIN 4844	400 71 351 601
Cover PU	cover with silk screened legend acc. DIN 4844	400 71 351 602
Cover PL	cover with silk screened legend	400 71 351 608
Cover PR	cover with silk screened legend	400 71 351 609
Cover PU	cover with silk screened legend	400 71 351 610
Dummy cover		400 71 351 197

<sup>\*</sup> Each luminaire requires 2 covers.

Installation material is not included in the scope of delivery of the luminaire. Please order installation material separately depending on the type of mounting (see accessories).

DM = ceiling mounting, WM = wall mounting, PM = pendulum mounting



# Accessories


Туре	Scope of supply	Order No.
Wire guard	71011 LED CG-S	400 71 348 370
Mounting kit for wall and ceiling mounting	for WM / DM rectangular 42 mm	400 71 351 011
Mounting kit for wall and ceiling mounting	for WM / DM rectangular 100 mm	400 71 351 497
Mounting kit for wall and ceiling mounting	for WM / DM rectangular 500 mm	400 71 351 498
Pendulum set 0.5 m	with canopy, silver, square form, for PM	400 71 344 599
Pendulum set 1.0 m	with canopy, silver, square form, for PM	400 71 350 775
Pendulum set 1.5 m	with canopy, silver, square form, for PM	400 71 350 776
Chain fastening	71021 LED CG-S	400 71 351 158




### 4

## Emergency Luminaire Aluminium-Enclosure 71011 LED CG-S 71021 LED CG-S


#### Dimensions (mm)



71011 LED CG-S



71021 LED CG-S DM



71021 LED CG-S PM



71021 LED CG-S WM

A = 42 mm, 100 mm and 500 mm

