

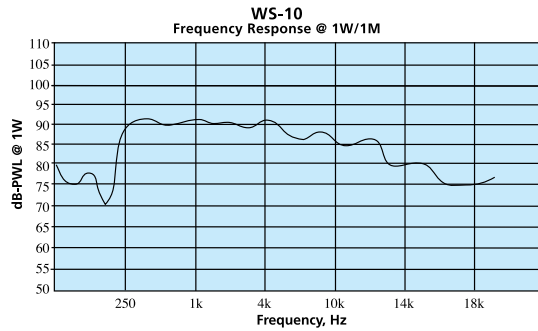
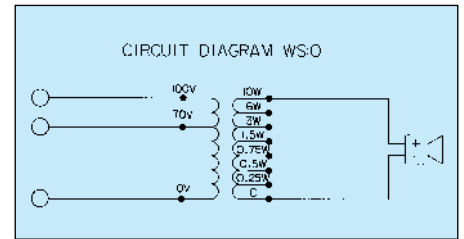


Designed to offer a high standard of visual appeal at a competitive price, the WS10 also incorporates significant benefits for the installer. With a separate back box, the wiring can be terminated before fit out. The speaker is fitted with a convenient and quick plug in connector allowing a rapid final fit.

Available as a 10W coaxial unit, with facility for glanded cable entry to allow the IP21 rating to be maintained. A stylish brushed stainless steel bezel is available as an optional extra to further enhance the superb aesthetics.

- ★ 101 dB(A) at 10 Watts at 1 metre.
- ★ 10 Watts with mutiple tappings, including a 6 watt tapping option.
- ★ All versions BS5839, part 8 compliant.
- ★ Coaxial drivers for enhanced performance.
- ★ Dual 100V/70V line transformer.
- ★ Stylish brushed stainless steel bezel available (supplied seperatly).

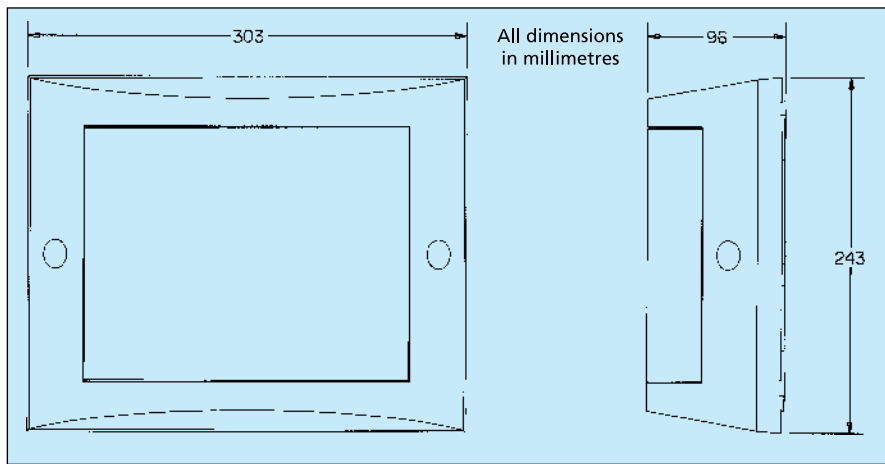

Specifications

WS10

Power, Watts:	10
Material:	ABS
Colour/finish:	White (Equivalent to RAL 9010)
Sound pressure level, power Watts/1m,dB(A): at 1 Watt at 1 metre:	101 91
Nett weight, Kg:	1.2
Max/min ambient temperature:	-10°C to +50°C
Effective frequency range, Hz:	150-20,000
Dispersion at 1,000hz, degrees° conical:	120
Mounting:	4.5Ø drilled as required
Terminal:	Ceramic Block
Transformer power tapings, Watts:	0.25, 0.5, 0.75, 1.5, 3, 6 and 10
Input impedance,Ω:	40k, 20k, 13.3k, 6.6k, 3.33k, 1.66k, 1k
Impedance,Ω:	8

Ordering Requirements

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model		Supplied Separately	
<input type="text"/>		<input type="text"/>	
Model	Code	Optional	Code
WS10 (10 Watts)	WS10T	Stainless Steel Bezel	WS10-Bezel

All the above specifications, dimensions, weights and tolerances are nominal (typical) and Next Two reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use.
DS224/D



LowSpeakers

MEDC Ltd

Colliery Road, Pinxton, Nottingham, NG16 6JF, U.K.
Tel: +44 (0)1773 864100
Fax: +44 (0)1773 582800
Sales Enq. Fax: +44 (0)1773 582830
Sales Orders Fax: +44 (0)1773 582832
E-mail: sales@medc.com
Website: www.medc.com