

The CAB-6 is an attractive 6 Watt wood effect wall mounted loudspeaker for excellent speech and music reproduction, available in teak and black finishes. Installation is made easy by an adjustable bearer allowing the model to be fitted on the most uneven surfaces. This unit comes complete with adjustable tappings on the line transformer.


The following items can be fitted on request; volume control, channel selection switch, restoration relay.


- ★ 98 dB(A) at 6 Watts at 1 metre.
- ★ Up to 6 Watts.
- ★ Veneered board.
- ★ Adjustable bearer.
- ★ 100V line transformer or 8 Ohm version.





Certificate No. Q5501

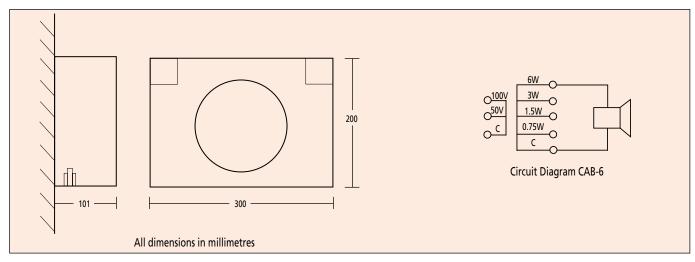



	CAB - 6		
Rated power, watts	6		
Material	Veneered Board		
Colour / finish	Teak/Black		
Sound pressure level, power watts / 1m, dB	98		
Sound pressure level, 1 watt / 1m, dB	90		
Net weight, Kg	2.2		
Effective frequency range, Hz	110-12,000		
Dispersion at 1,000hz, degrees° conical	140		
Mounting	Screws/bearer		
Terminal	Spring Clamp		
Transformer power tappings, watts	0.75, 1.5, 3, 6		
Imput impedance standard model, ohms	13.33k, 6.66k, 3.33k, 1.66k		
Ambient temperature:	−5°C to +40°C		

Ordering Requirements

The following code is designed to help in the selection of the correct unit. Build up the reference number by inserting the code for each component into the appropriate box.

Model	Option			Finish		
	Option		Code	Finish	Code	
	100V line transformer		Т	Black	В	
	100V line trans	TVC	Teak	Т		
	and volume co 100V line trans and relay resto	former	TRR			
	8 Ohm		8 Ohm			

All the above specifications, dimensions, weights and tolerances are nominal (typical) and Next Two reserve the right to vary all data without prior notice. No liability is accepted for any consequence of use. DS211/B



Loudspeakers MEDC Ltd

Colliery Road, Pinxton, Nottingham, NG16 6JF, U.K.

Tel: +44 (0)1773 864100 Fax: +44 (0)1773 582800

Sales Enq. Fax: +44 (0)1773 582830 Sales Orders Fax: +44 (0)1773 582832

E-mail: sales@medc.com Website: www.medc.com